

Reinventing Technology



*BIFURCATED
INLINE FAN*

Features

- Direct Driven Centrifugal Fan.
- Air Volume upto 1500 CMH.
- Motor Outside Air Stream.
- Low and Easy Maintenance.
- Suitable for Kitchen Exhaust & Industrial Applications

www.airflow.in


Performance Parameter

Model	Rated Voltage (v)	Rated Frequency (Hz)	Power (w)	Capacity (m³/h)	Noise dB(A)	Static Pressure (Pa)	Pipes Size (mm)	Matching area (m²)	Weight (kg)
AFBF10-11A	220	50	18	150	36	65	Φ 100	5-10	2.2
AFBF 15-33A	220	50	35	320	42	110	Φ 150	14-20	3.4
AFBF 15-43A	220	50	45	400	46	115	Φ 150	20-25	4.2
AFBF 15-44A	220	50	65	520	48	145	Φ 150	25-28	4.3
AFBF 20-54A	220	50	75	630	48	148	Φ 200	28-33	7.0
AFBF20-54A1	220	50	138	800	48	203	Φ 200	33-38	7.2
AFBF20-54A2	220	50	160	1000	50	208	Φ 200	38-42	8.9
AFBF 20-64A	220	50	200	1200	55	210	Φ 200	42-48	11.5
AFBF 20-65A	220	50	240	1500	58	220	Φ 200	48-65	11.5

Product Dimensions Unit:mm


Model	A	B	C	D	E	F	G	H	L	
AFBF 10-11A	215	183	98	105	120	200	120	180	6.5x20	Φ 100
AFBF 15-33A	268	230	149	132	151	254	120	206	6.5x20	Φ 150
AFBF 15-43A	336	250	149	142	157	254	160	219	6.5x20	Φ 150
AFBF 15-44A	336	250	149	142	157	254	160	219	6.5x20	Φ 150
AFBF 20-54A	345	300	199	189	214	346	160	300	10x20	Φ 200
AFBF 20-54A1	345	300	199	189	214	346	160	300	10x20	Φ 200
AFBF 20-54A2	345	300	199	189	214	346	160	300	10x20	Φ 200
AFBF 20-64A	376	330	199	224	255	374	200	345	12x24	Φ 200
AFBF 20-65A	376	330	199	224	255	374	200	345	12x24	Φ 200

Product Size

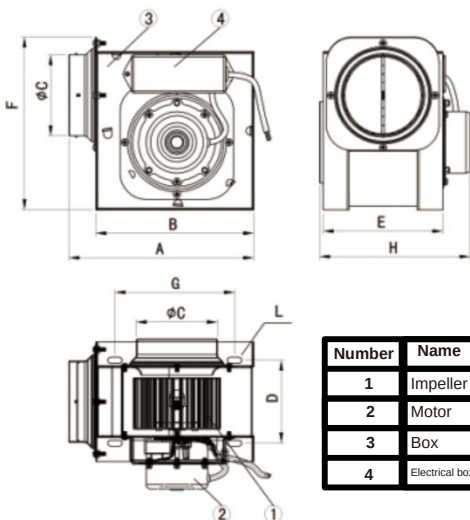

Number	Name	Quantity
1	Impeller	1
2	Motor	1
3	Box	1
4	Electrical box	1

Installation Diagram

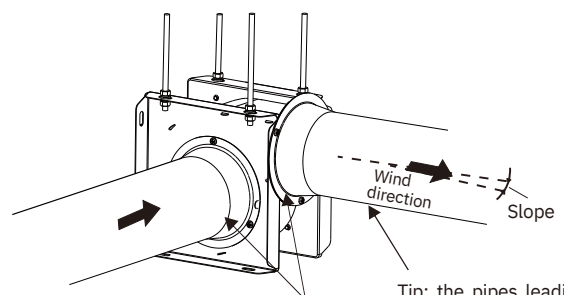

Please use non-flammable adhesive tape to connect the duct and connector

Tip: the pipes leading out of the house must be kept down to prevent rain or frosty water from flowing backward.



AIR FLOW PVT. LTD. (An ISO 9001:2008 Certified)

J-90 & 91, Site-V, Surajpur UPSIDC Industrial Area, Kasna, Greater Noida (U.P - 201310)

Phone: +91-120-4295527, +91-120-4295526

Email: mail@airflow.in, sales@airflow.in

Website: www.airflow.in

