
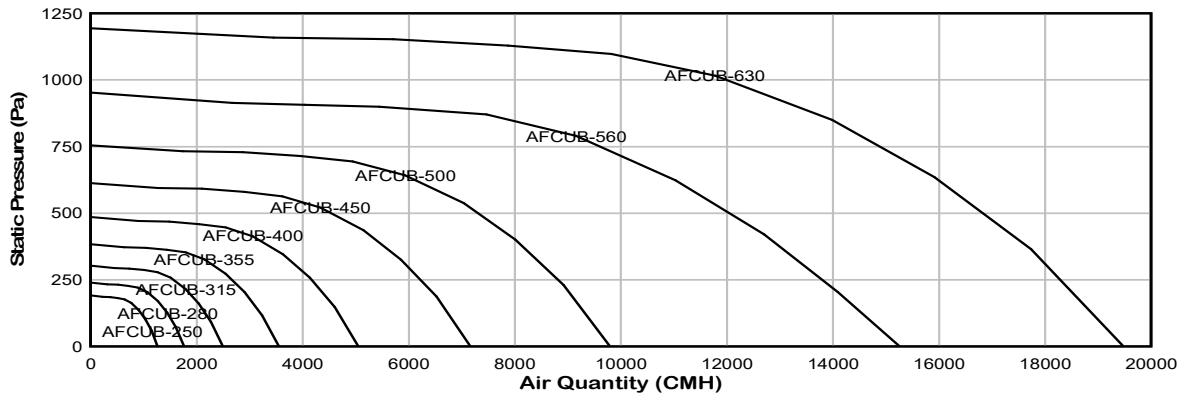


TECHNICAL DETAILS & DIMENSIONAL

Unit Model	Air Flow at Free Discharge (CMH)	Air Flow (CMH)/Static Pressure	Motor (KW/Pole)	Noise @ 3mtr (dBA)	A	Outlet (E X E)	Inlet (F X F)
AF-CUB-PF-250	1260	800CMH / 15mmWg	0.25/ 4Pole	49	530	300X300	300X300
AF-CUB-PF-280	1760	1000CMH / 21mmWg	0.25/ 4Pole	51	550	330X330	330X330
AF-CUB-PF-315	2490	1000CMH / 30mmWg	0.25/ 4Pole	53	590	365X365	365X365
AF-CUB-PF-355	3550	2000CMH / 35mmWg	0.37/ 4Pole	56	635	405X405	405X405
AF-CUB-PF-400	5055	3000CMH / 42mmWg	0.55/ 4Pole	55	700	450X450	450X450
AF-CUB-PF-450	7165	5000CMH / 45mmWg	1.10/ 4Pole	63	775	500X500	500X500
AF-CUB-PF-500	9797	7200CMH / 50mmWg	1.80/ 4Pole	67	850	550X550	550X550
AF-CUB-PF-560	15260	10880CMH / 65mmWg	3.00/ 4Pole	71	940	610X610	610X610
AF-CUB-PF-630	21664	16150CMH / 75mmWg	5.50/ 4Pole	74	1045	680X680	680X680

*All dimension are in mm

GA DRAWING

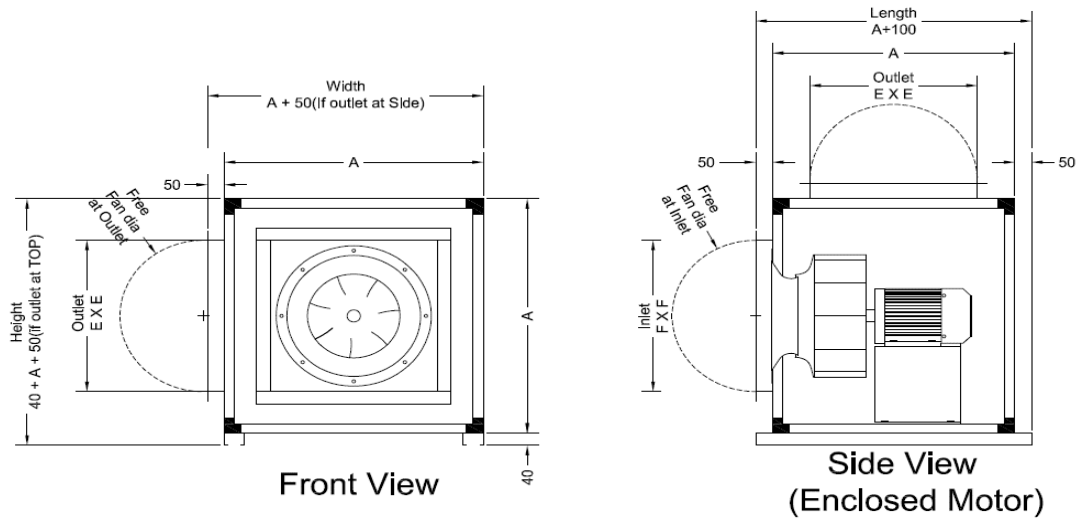

OPTIONAL ACCESSORIES

- 1) AMCA Certified Plug Fan
- 2) Single Phase Motor
- 3) Variable Frequency Drive



AIR FLOW PVT. LTD. (An ISO 9001:2008 Certified)

