



Reinventing Technology



Direct Driven Bifurcated Exhaust Fan

Features



- **Direct Driven Aluminium Plug Fan.**
- **Highly Energy Efficient.**
- **Motor Outside Air Stream.**
- **Universal Air Outlet (Left, Right or Top, Can be Field Adjustable).**
- **Low and Easy Maintenance.**
- **Available in Single Skin / Double Skin Cabinet / Accoustically Lined.**
- **Suitable for Kitchen Exhaust, Outdoor & Industrial Applications.**

TECHNICAL DETAIL & DIMENSIONAL

Unit Model	CMH	Static Pressure (mm)	Motor KW/Pole	Noise @ 3mtr (dbA)	(A)	(B)	(C)	(L) (Option)	(D)	(E)	Inlet (F)	Inlet Velocity	Outlet Velocity
AFKE 250	800	15	0.25/4	49	475	210	505	530	415	180	300	2.47	2.97
AFKE 280	1000	21	0.25/4	51	520	230	525	550	460	200	330	2.55	3.02
AFKE 315	1000	30	0.25/4	53	575	250	545	570	515	220	365	2.09	2.45
AFKE 355	2000	35	0.37/4	56	635	275	570	595	535	245	405	3.39	4.24
AFKE 400	3000	42	0.55/4	55	700	305	635	660	640	275	450	4.12	4.73
AFKE 450	5000	45	1.10/4	63	775	335	700	725	715	305	500	5.56	6.37
AFKE 500	7200	50	1.80/4	67	850	375	740	765	750	325	550	6.61	8.21
AFKE 560	10000	65	3.00/4	71	940	410	810	835	840	360	610	7.47	9.19
AFKE 630	15000	75	5.50/4	74	1045	445	920	945	945	395	680	9.01	11.16

* All dimension are in mm.

GA DRAWING

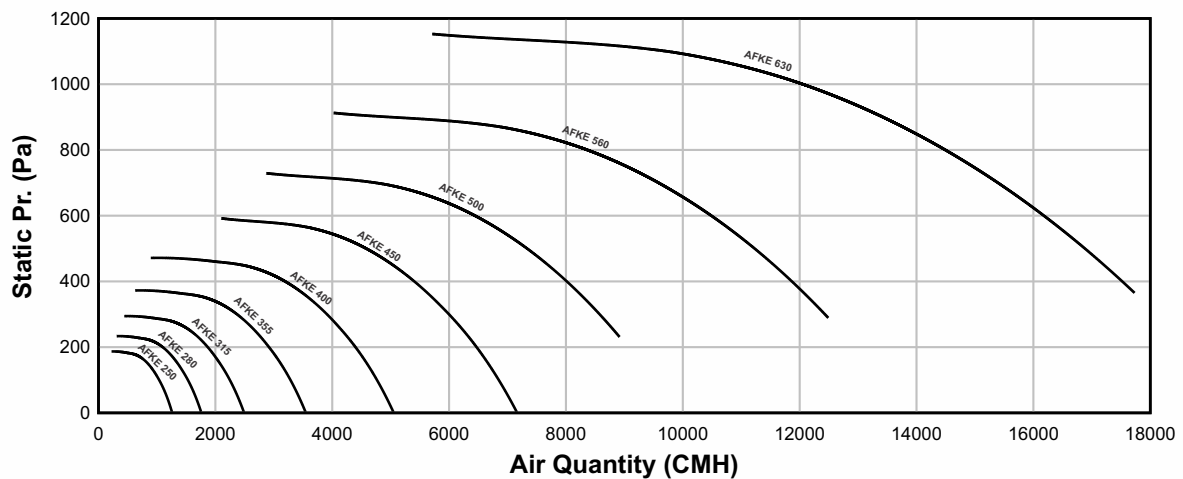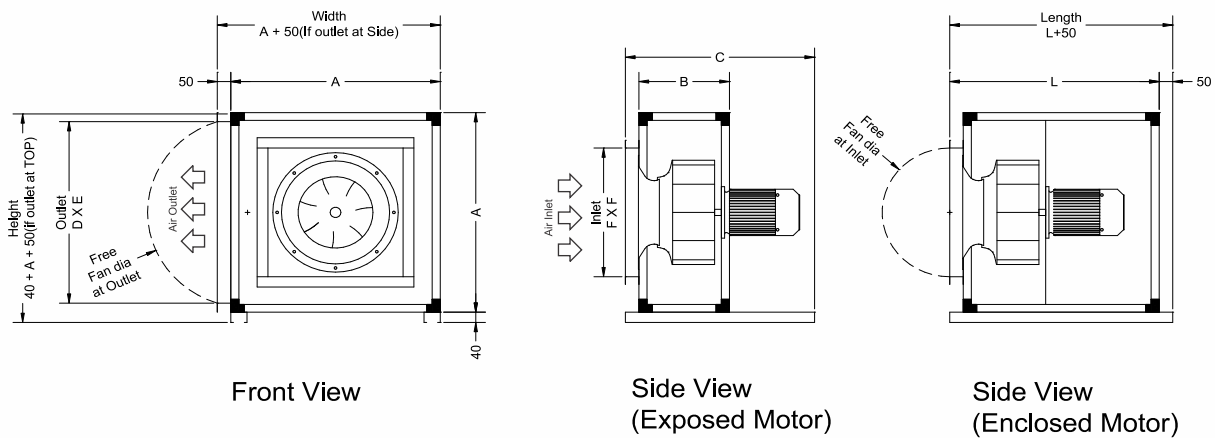

OPTIONAL ACCESSORIES

- 1) AMCA Certified Plug Fan
- 2) Single Phase Motor
- 3) Variable Frequency Drive



AIR FLOW PVT. LTD. (An ISO 9001:2008 Certified)

J-90 & 91, Site-V, Surajpur UPSIDC Industrial Area, Kasna, Greater Noida (U.P - 201310)

Phone: +91-120-4295527, +91-120-4295526

Email: mail@airflow.in, sales@airflow.in

Website: www.airflow.in

