


Y-TYPE STRAINER (FLANGED) PN16

SALIENT FEATURES

- Cast Iron Body with Powdercoating
- Flange end : IS 1538 / ISO7005-2 Standard
- Non Corrosionable SS304 perforated Sheet Screen
- Fine finish and Smooth Contour to minimize pressure drop inside the strainer
- Large Screening area makes the strainer highly efficient in performance

SPECIFICATIONS

Size Range	DN20-DN350
Body	Cast Iron
Mesh	Stainless Steel (SS304)
Nominal pressure	PN 16
Test Pressure	Shell Test : 24 bar
Medium	Chilled and hotwater
Medium Temp.	-10°C to120°C
End Connection	(ISO7005-2)/IS 1538

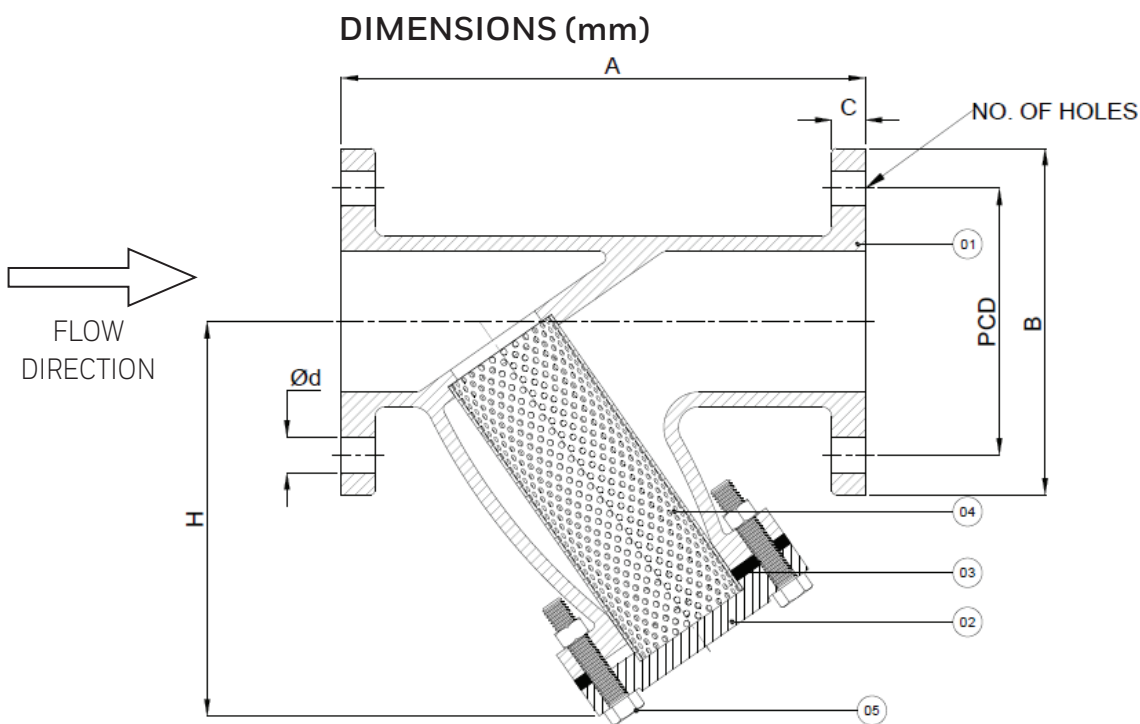

PART DESCRIPTIONS

PT No.	PART NAME	MATERIAL	SPECIFICATION	Qty
01	Body	Cast Iron	IS 210 Gr. FG 200	1
02	Cover	Cast Iron	IS 210 Gr. FG 200	1
03	Gasket	Rubber	EPDM	1
04	Filter	Screen Stainless Steel	SS304	1
05	Fastners	M.S.	Mild Steel	4
06	Name Plate	Aluminum	Aluminum	1

OUTSIDE DIMENSION MM (INCH)

DN Size	Face to face (A)±1.5	Flange diameter (B)±2	Flange thickness (C)±1.5	Flange PCD ±1.5	Height (H) ±3	No. of Bolts	Bolt Hole Size	Mesh Hole Size ±0.5	No. of holes per Sq. inch
20 (3/4")	165	105	18	75	142	4	14	Φ1/16"	67
25 (1")	170	115	18	85	142	4	14	Φ1/16"	67
32 (1-1/4")	185	140	19	100	145	4	19	Φ1/16"	67
40 (1-1/2")	205	135	16	110	162	4	19	Φ1/16"	67
50 (2")	205	154	16	125	175	4	19	Φ1/16"	67
65 (2-1/2")	220	160	16	145	191	4	19	Φ1/16"	67
80 (3")	265	186	17	160	225	8	19	Φ1/8"	27
100 (4")	330	215	20	180	236	8	19	Φ1/8"	27
125 (5")	418	255	20	210	275	8	19	Φ1/8"	27
150 (6")	440	285	22	240	325	8	23	Φ1/8"	27
200 (8")	525	340	23	295	375	12	23	Φ1/8"	27
250 (10")	725	406	25	355	565	12	28	Φ1/8"	27
300 (12")	750	480	25	410	670	12	28	Φ1/8"	27
350 (14")	845	535	30	470	720	16	28	Φ1/8"	27

For more information,
www.honeywellbuildings.in
Call: 000-8000-502167,
Email: enquiry.mms@honeywell.com, bmsindiatechsupport@honeywell.com

Honeywell HBT India Buildings
Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurgaon - 122 002.

