


Y-TYPE STRAINER (SCREWED)

SALIENT FEATURES

- Cast Iron Body with Powder coating
- Screwed female ends to BSP thread
- Non corrosionable SS304 perforated Sheet Screen
- Fine finish and Smooth Contour to minimize pressure drop inside the strainer
- Large Screening area makes the strainer highly efficient in performance

SPECIFICATIONS

Size Range	DN15-DN80
Body	Cast Iron
Mesh	Stainless Steel (SS304)
Nominal pressure	PN 16
Test Pressure	Shell Test : 24 bar
Medium	Chilled and hotwater
Medium Temp.	-10°C to110°C
End Connection	Screwed Female Ends to IS 554 / BS 21 / ISO 7

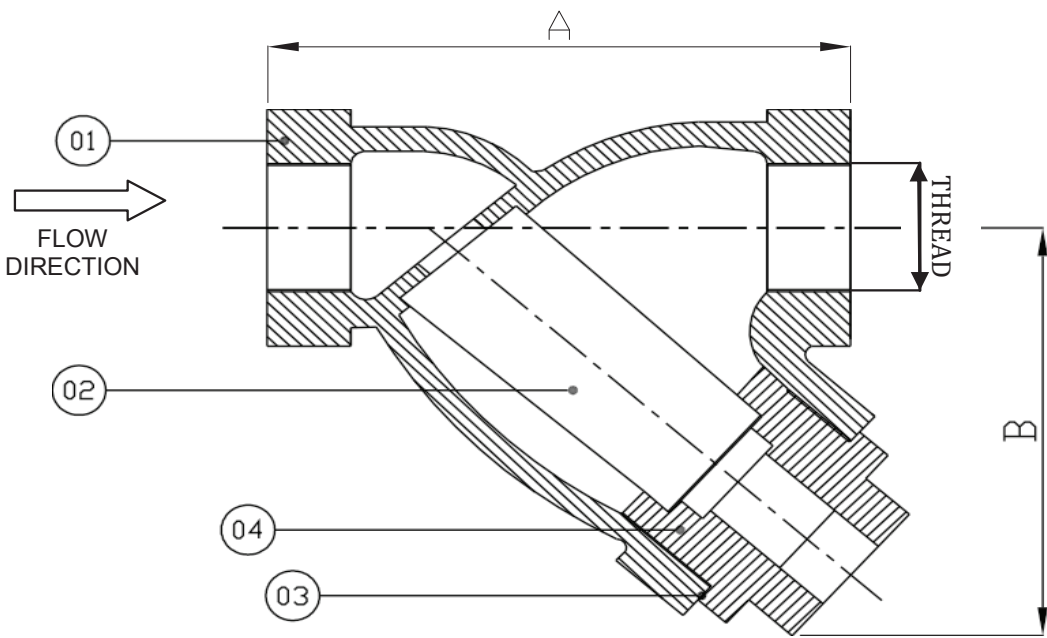

PART DESCRIPTIONS

PART NO.	NAME	MATERIAL	SPECIFICATION	QTY.
1	BODY	CAST IRON	IS:210 GR. FG200	1
2	COVER	CAST IRON	IS:210,GR. FG200	1
3	GASKET	RUBBER	EPDM	1
4	FILTER SCREEN	STAINLESS STEEL	TYPE 304	1
5	NAME PLATE	ALUMINIUM	ALUMINIUM	1

OUTSIDE DIMENSION MM (INCH)

DN Size	Face to face (A) ± 1.5	Height (B) ± 2.5	Thread	Mesh Hole Size ± 0.2	No. of holes per sq. inch
15 (1/2")	75	61	1/2" bsp	Ø1/16"	67
20 (3/4")	92	71	3/4" bsp	Ø1/16"	67
25 (1")	108	80	1" bsp	Ø1/16"	67
32 (1-1/4")	133	108	1-1/4" bsp	Ø1/16"	67
40 (1-1/2")	156	152	1-1/2" bsp	Ø1/16"	67
50 (2")	190	155	2" bsp	Ø1/16"	67
65 (2-1/2")	246	166	2-1/2" bsp	Ø1/16"	67
80 (3")	275	202	3" bsp	Ø 1/8"	27

For more information,
www.honeywellbuildings.in
Call: 000-8000-502167,
Email: enquiry.mms@honeywell.com, bmsindiatechsupport@honeywell.com

Honeywell HBT India Buildings
Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurgaon - 122 002.

