

NEWAGE FIRE PROTECTION **INDUSTRIES** PRIVATE LIMITED

FIRE PROTECTION, SAFETY & RESCUE EQUIPMENT | FIRE DETECTION & SUPPRESSION SYSTEM



www.newagefireprotection.com

We are...

NEWAGE Fire Protection Industries Pvt. Ltd.

NEWAGE is a manufacturer of a wide range of fire protection equipments, such as Fire Hoses, Couplings, Landing Valves, Hydrants, Dry Riser Equipments, Hose Reels, Cabinets, Nozzles, Monitors, Foam Equipments, Water Sprinkler Systems Equipment, Fire Pumps, etc. and related ancillaries. We are ISO 9001:2000 certified.

All our products are manufactured conforming to relevant Indian and International Standards. We have an added edge of being able to customize products to specific client specifications.

We export to more than 60 countries. **NEWAGE** totally understand fire safety and it is our constant endeavor to provide the best fire solution to our customers.

Our product lines include:

- Fire Hoses
- Fire Hose Reels
- Hydrant Line Fittings – Gunmetal, Aluminium Alloy, Stainless Steel
- Pressure Reducing Valves for Hydrants and Sprinklers
- Yard and Underground Dry/Wet Riser Equipments
- Fire Hose/Extinguisher Cabinets
- High Value Long Range Monitors
- Automatic Hand-held Nozzles
- Foam Equipments and Systems
- Portable
- DCP Skids
- Pumps
- Flexible Pipes for Sprinklers
- Alarm Valve
- RimSeal Fire Protection Systems
- Water Mist Systems
- Co2 Systems
- Inert Gas Systems
- Clean Agent System (FM 200 NOVEC 1230)
- Fire Detection and Alarm System
- Dry Chemical Powder Fire Protection System

OUR VISION STATEMENT

**A major diversified, transnational integrated
Company engaged in fire fighting and fire protection**

With the prime objective of safety,
security, rescue and protection of life &
property, coupled with international leadership
and a strong environmental
conscience.

OUR MISSION STATEMENT

To attain leadership in products development, technical adaptation and
assimilating state-of-the-art technology for competitive advantage.

To provide technology and services through sustained
research and development.

To cultivate total Quality Management for a strong corporate identity
and high standard of business ethics.

To enrich the quality of life whilst maintaining an environmental conscience.

To achieve international standards of excellence in all aspects of
safety, security, rescue and protection of human life and property.



INDEX

A) Fire Hoses

1) Pyroprotect / Pyroflex	1
2) Premier Extra / Fyrftyter Super	1
3) Premier / Fyrftyter	2
4) Water Shield	2
5) Blindex	3

B) Couplings & Adapters

1) Instantaneous Couplings	4
2) Threaded Couplings	4
3) Suction Couplings	4
4) Storz Couplings	4
5) Blank Caps / Plugs	5
6) Flanged And Shore Connection	5
7) Threaded Adapters	5
8) Gate Valves	5

C) Landing Valves

1) Oblique Type	6
2) Straight Type	6
3) Right Angled Type	6
4) Bib Nose Type	6
5) Turn Down Type	7
6) Double Outlet	7
7) Hose Valve	7
8) Pressure Restricting Valve	7
9) Controlled Pressure Hydrant Valve	7

D) Stand-Post Hydrants

1) Two Way Fire Hydrant	8
2) Four Way Fire Hydrant	8
3) Hydrant With Monitor	8

E) Dry Riser Equipments

1) 2-Way Inlet Breeching	9
2) 3-Way Inlet Breeching	9
3) 4-Way Inlet Breeching	9
4) Air Release Valve	9
5) Dividing And Collecting Breeching	9

F) Hose Reel

1) Hose Reel Nozzles	10
I) PVC/ ABS Nozzles	10
II) Bronze Nozzles	10
2) Wall Mounted Type	10

G) Cabinets

1) Hose box	11
I) Model A	11
II) Model B	11
III) Model C	11
2) Extinguisher Box	11

H) Nozzles

1) Short Branch Pipe	12
2) Triple Purpose / Universal Branch Pipe	12
3) Jet - Spray and Shut Off Nozzle	12
4) Three Position Branch Pipe	13
5) Fog Nozzle	13
6) Hand Controlled Branch Pipe	13
7) Revolving Type Branch Pipe	14
8) Curtain Nozzle	14
9) Constant Gallonage Nozzle	14
I) Nuelite	14
II) Fast Action Nozzle - Junior	15
10) Dual Pressure Nozzle - Fast Action	15
11) Selectable Gallonage Nozzle	16
I) Superfire	16
II) Superfire Junior	16
12) Multipurpose Nozzle-Aquajet	17
13) Foam Tubes	17
14) High Pressure Nozzle-Challenger	17
15) Nozzles for Marine Application	18
16) Portable Spray Hose Nozzle	18

I) Monitors

1) Water Jet Monitor	19
2) Long Range Monitor	19
3) Long Range Water Foam Monitor	20
4) Water Foam Monitor : Torpedo	20
I) Monitor with Nozzle	20
II) Jet Ratio Controller Pump	21
5) Portable Ground Monitor	21
I) Commando	21
II) Nano	21
6) Remote Control Monitor: Terminator	22
7) Oscillating Monitor - Stand Post Mounted	22
8) Trolley Mounted Monitor	23
9) Trailer Mounted Monitor with Foam Tank	23

INDEX

J) Foam Equipments

1) Low Expansion Branch Pipe	24
I) Model A	24
II) Model B	24
2) Medium Expansion Foam Branch Pipe	24
3) Foam Generator	25
I) Mini Turbex	25
II) HI-EX	25
III) Inline Foam Generator	26
4) Mobile Foam Unit	26
I) With FRP Tank	26
II) With Steel Tank	26
5) Foam Maker with Vapour Seal	27
6) Foam Maker without Vapour Seal	27
7) Inline Inductor	28
I) Variable Inline Inductor	28
II) Fixed Inline Inductor	28
8) Foam Used In Fire Protection	29
I) Protein Foam Compound	29
II) Fluoro-protein Foam Compound	29
III) High Expansion Foam Compound	29
IV) Aqueous Film Forming Foam(AFFF)	29

K) Water Based Sprinkler System Equipment

1) Water Spray Nozzles	30
I) Medium Velocity Nozzle	30
II) High Velocity Nozzle	30
2) Automatic Sprinklers	30
I) Pendent Type	30
II) Upright Type	31
III) Side Wall Type	31
IV) Concealed Type	31
3) Sprinkler Flexible Hoses	32
I) Unbraided Flexible Sprinkler Hose	32
II) Braided Flexible Sprinkler Hose	33
4) Alarm Valve System	34
5) Butterfly Valve	34

L) Fire Fighting Pump

1) Portable Pump	35
I) Low Discharge Pump	35
II) High Discharge Pump	35
2) Aqua Float, The Floating Pump	36
3) Turbo Pump	36
4) Dewatering Pump	37
I) Ejector Pump	37
II) Adjustable Ejector Pump	37
5) Portable Water Mist System	37

M) Miscellaneous

1) Warning Appliances	38
I) Hand Operated Siren	38
II) Electric Operated Siren	38
2) Smoke Extractor Fan	38
A) Water Turbine Driven	38
B) Petrol Engine Driven	39
C) Electric Motor Driven	39
3) Smoke Generator	39
4) Hose Washing Machine	40
5) Hose Binding Machine	40

1 Pyroprotect / Pyroflex



- UL Listed - USA and Canada
- Bearing IS 636:2018 Type 3 mark
- Wheelmark approved
- With BS 6391 Type 3 Kite Mark, EN 14540(2004)
- Smooth inner unified lining of specially formulated polymer, with very low friction loss
- Made of high tenacity fibres
- Synthetic rubber compound specially formulated for abrasion and chemical resistance and ozone flexibility protection against ageing
- Ribbed for hose protection and easy handling
- Standard colour: Reddish brown
- Options: Black, blue, yellow, green, orange

Product Code No.	Sizes	Working Pressure PSI/Kg/cm ²	Burst Pressure PSI/Kg/cm ²
FH-PY-25	1"	250/17	750/50
FH-PY-38	1 1/2"	250/17	750/50
FH-PY-45	1 3/4"	250/17	750/50
FH-PY-50	2"	250/17	750/50
FH-PY-63	2 1/2"	250/17	750/50
FH-PY-70	2 3/4"	250/17	750/50
FH-PY-76	3"	210/15	625/45
FH-PY-100	4"	210/15	500/35
FH-PY-150	6"	210/15	500/45

2 Premier Extra / Fyrfyter Super



- Bearing IS 636:2018 Type 2 mark
- Wheelmark approved
- Conforming to BS 6391 Type 2, DIN 14811, UL 219, UL 19, EN 14540(2004)
- Jacket made up of 100% polyester for extra strength
- Special quality black EPDM internal rubber lining withstands heat and polluted water
- External coat of synthetic elastomer protects against moisture, fungus, oils, heat & abrasion
- Standard colour: Red
- Options: Green, blue, yellow, orange, black

Product Code No.	Sizes	Working Pressure PSI/Kg/cm ²	Burst Pressure PSI/Kg/cm ²
FH-PE-25	1"	205/14	710/50
FH-PE-38	1 1/2"	205/14	710/50
FH-PE-45	1 3/4"	205/14	710/50
FH-PE-50	2"	205/14	710/50
FH-PE-63	2 1/2"	175/12	640/45
FH-PE-70	2 3/4"	175/12	640/45
FH-PE-76	3"	145/10	500/35
FH-PE-100	4"	145/10	500/35
FH-PE-125	5"	100/7	425/30
FH-PE-150	6"	100/7	425/30

3 Premier / Fyrfyter



- Bearing IS 636:2018 Type I mark
- Wheelmark approved
- Conforming to BS 6391 Type 1, DIN 14811, UL 219, UL 19, EN 14540(2004)
- Jacket made of 100% polyester for extra strength
- Special quality black EPDM internal rubber lining withstands heat and polluted water
- Heat and abrasion resistant

Product Code No.	Sizes	Working Pressure PSI/Kg/cm ²	Burst Pressure PSI/Kg/cm ²
FH-PR-38	1 ½"	210/15	710/45
FH-PR-45	1 ¾"	210/15	710/45
FH-PR-50	2"	210/15	710/45
FH-PR-63	2 ½"	210/15	640/45
FH-PR-70	2 ¾"	210/15	640/45
FH-PR-76	3"	145/10	500/35
FH-PR-100	4"	145/10	500/35
FH-PR-125	5"	145/10	500/35
FH-PR-150	6"	145/10	500/35

4 Water Shield



- Bearing IS 8423:94 mark
- Incorporates controlled percolating system, combining advantages of low friction, high strength, lightweight and flexibility of a rubber lined hose and the heat resistant quality of flax hose
- Jacket made from synthetic yarn for extra strength
- Ideal for forestry and industrial fires

Product Code No.	Sizes	Working Pressure PSI/Kg/cm ²	Burst Pressure PSI/Kg/cm ²
FH-WS-38	1 ½"	175/12	570/40
FH-WS-45	1 ¾"	175/12	570/40
FH-WS-50	2"	175/12	570/40
FH-WS-63	2 ½"	175/12	570/40
FH-WS-70	2 ¾"	175/12	570/40
FH-WS-76	3"	175/12	570/40
FH-WS-100	4"	100/7	400/28
FH-WS-125	5"	100/7	400/28
FH-WS-150	6"	100/7	400/28




5 Blindex



The Finest Fire Fighting Hose. Blindex is A Tough Defendable Fire Hose With Performance That Far Exceeds Existing Fire Hoses Highly Appropriate For Municipalities, Forestry, Industry, Refineries Ships And Wherever Safety And Efficiency Are Priorities.

BLINDEX IS A RUBBER COVERED HOSE WITH EXTRA SAFETY GIVEN BY THE FOURTH LAYER OF RLH.

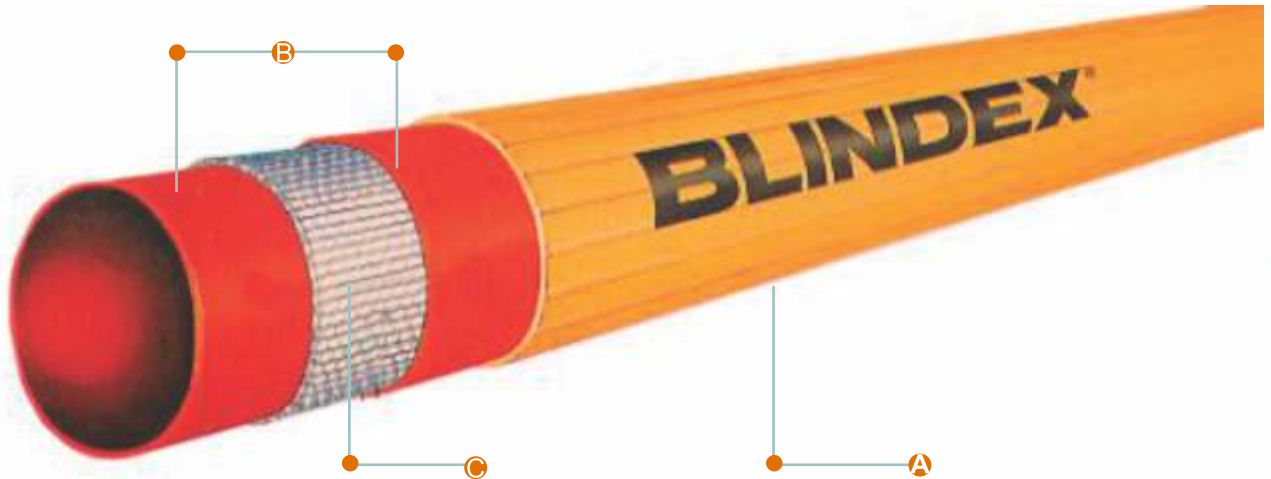

RLH IS STANDARD FOR NUCLEAR CABLE PROTECTION.

Technical Data

Nominal ID*		Working P.**		Weight		Thickness		Bend Radius at WP	
Inch	mm	psi	K Pa	lb/ft	gr/m.	inch	mm	ft	mm
1	25	450	3100	0,147	220	0,087	2,2	2,90	900
1 1/2	38	300	2100	0,240	360	0,091	2,3	3,60	1100
1 3/4	45	300	2100	0,274	410	0,094	2,4	3,90	1200
2	52	250	1750	0,327	490	0,094	2,4	4,25	1300
2 1/2	65	250	1750	0,434	650	0,098	2,5	4,50	1375
2 3/4	70	250	1750	0,468	700	0,098	2,5	4,60	1400
3	78	250	1750	0,501	750	0,098	2,5	4,75	1450

* Dimensional tolerance = Nominal Diameter + 0.080" minimum.

** Minimum safety factor of 3 to 1 over working pressure for fluids.

Manufactured by **tipsa** Spain.



1 Instantaneous Couplings



- Bearing IS 903 mark
- Conforming to BS 336
- Working pressure : 150 PSI / 10.5 Kg/cm²
- Test pressure : 325 PSI / 22.5 Kg/cm²

Product Code No.	Description	Types	Material Of Construction
CP-IC-01	2 1/2" X 2 1/2"	Ribbed Multi-serrated	Gunmetal Aluminium alloy S.S 304 S.S 316 Brass
CP-IC-02	2 1/2" X 2 3/4"		
CP-IC-03	2 1/2" X 2"		
CP-IC-04	2 1/2" X 1 1/2"		
CP-IC-05	2" X 2"		
CP-IC-06	1 1/2" X 1 1/2"		

2 Threaded Couplings



- Working pressure : 150 PSI / 10.5 Kg/cm²
- Test pressure : 325 PSI / 22.5 Kg/cm²
- Type : Rocker lug or pin type

Product Code No.	Description	Material Of Construction
CP-TC-01	With 2 1/2" NST Threads	Aluminium alloy Gunmetal
CP-TC-02	With 2 1/2" NH Threads	
CP-TC-03	With 1 1/2" NST Threads	
CP-TC-04	With 1 1/2" NH Threads	

3 Suction Couplings



- Conforming to BS 336, IS 902
- Connection threads : Round threads as per BS 336 / IS 902
- Working pressure : 150 PSI / 10.5 Kg/cm²
- Test pressure : 325 PSI / 22.5 Kg/cm²

Product Code No.	Description	Material Of Construction
CP-SC-01	3"	Aluminium alloy Gunmetal
CP-SC-02	4"	
CP-SC-03	5 1/2"	

4 Storz Couplings



- Working pressure : 150 PSI
- Test pressure : 325 PSI

Product Code No.	Description	Material Of Construction
CP-SZ-01	Storz hose coupling for 1 1/2" hose	Gunmetal
CP-SZ-02	Storz hose coupling for 2 1/2" hose	Aluminium alloy

5 Blank Caps / Plugs



- Size : 2 1/2" (63 mm) as per BS 336 / IS 903
- Working pressure : 150 PSI /10.5 Kg/cm²
- Test pressure : 325 PSI / 22.5 Kg/cm²

Product Code No.	Description
CP-BC-01	Male Inst. in Gunmetal (2 1/2")
CP-BC-02	Male Inst. in Brass (2 1/2")
CP-BC-03	Male Inst. in Aluminum (2 1/2")
CP-BC-04	Male Inst. in ABS (2 1/2")
CP-BC-05	Female Inst. In Gunmetal (2 1/2")
CP-BC-06	Female Inst. in Brass (2 1/2")
CP-BC-07	Female Inst. In Aluminum (2 1/2")
CP-BC-08	Female round thread In Gunmetal 4" BSRT
CP-BC-09	Female round thread In Gunmetal 5 1/2" BSRT
CP-BC-10	Female round thread In Gunmetal 3 " BSRT

6 Flanged & Shore Connection



- Inlet flange : Conforming to ANSI, B16.5 / IS 1538(Part IV)
- Outlets : 2 1/2" (63 mm) as per BS 336 / IS 903
- Working pressure : 150 PSI /10.5 Kg/cm²
- Test pressure : 325 PSI /22.5 Kg/cm²

Product Code No.	Description	Material Of Construction
CP-SHC-01	2 1/2" Male inst. & 2 1/2" flange	Gunmetal / S.S.
CP-SHC-02	2 1/2" Female inst. & 2 1/2" flange	
CP-SHC-03	2 1/2" Male inst. & 3" flange	
CP-SHC-04	2 1/2" Female inst. & 3" flange	

7 Threaded Adaptors



- I) Male Adaptors
- II) Female Adaptors

- Body : Gunmetal / Aluminium alloy / S.S / Brass
- Size : 2 1/2" (63 mm) / 1 1/2"(38 mm)
- Working pressure : 150 PSI /10.5 Kg/cm²
- Test pressure : 325 PSI / 22.5 Kg/cm²

8 Gate Valves



Product Code No.	Description
LV-GV-01	Made in Gunmetal flanged inlet as per ANSI
LV-GV-02	Made in Gunmetal flanged inlet as per PN16
LV-GV-03	Made in Gunmetal BSP female threaded inlet
LV-GV-04	Made in Gunmetal NH female threaded inlet

Governing Standard: BS 5041 Part 1 & IS 5290

- Body : Gunmetal / Stainless steel / Brass / Alumin Alloy
- Hand wheel : Cast iron
- Inlet : Flanged or BSP/ NPT threaded
- Outlet : Female instantaneous or male BSP/ NH threaded

- Working pressure : 150 PSI / 10.5 Kg/cm²
- Seat Test : 240 PSI / 16 Kg/cm²
- Body Test : 435 PSI / 30 Kg/cm²

1 Oblique Type Landing Valve



Product Code No.	Description	Inlet Sizes	Outlets	Material Of Construction
LV-OT-38	1 1/2" (38mm) Size	Flanged inlet as per ANSI/IS 1538(Part IV) Flanged inlet as per PN16 BSP Male threaded inlet NPT Male threaded inlet	2 1/2" Female Instantaneous 2 1/2" NH(M) 2 1/2" NST(M) 2 1/2" BSP (M)	Gunmetal Aluminium alloy S.S
LV-OT-63	2 1/2" (63mm) Size			
LV-OT-75	3" (75mm) Size			

2 Straight Type Landing Valve



Product Code No.	Description	Inlet Sizes	Outlets	Material Of Construction
LV-ST-63	2 1/2" (63mm) Size	Flanged inlet as per ANSI Flanged inlet as per PN16 BSP Male threaded inlet NPT Male threaded inlet	2 1/2" Female Instantaneous 2 1/2" NH(M) 2 1/2" NST(M) 2 1/2" BSP(M)	Gunmetal
LV-ST-75	3" (75mm) Size			

3 Right Angle Type Landing Valve



Product Code No.	Description	Inlet Sizes	Outlets	Material Of Construction
LV-RT-63	2 1/2" (63mm) Size	Flanged inlet as per ANSI Flanged inlet as per PN16 BSP Male threaded inlet NPT Male threaded inlet	2 1/2" Female Instantaneous 2 1/2" NH(M) 2 1/2" NST(M) 2 1/2" BSP(M)	Gunmetal

4 Bib Nose Type Landing Valve



Product Code No.	Description	Inlet Sizes	Outlets	Material Of Construction
LV-BT-63	2 1/2" (63mm) Size	Flanged inlet as per ANSI Flanged inlet as per PN16 BSP Male threaded inlet NPT Male threaded inlet	2 1/2" Female Instantaneous	Gunmetal
LV-BT-75	3" (75mm) Size			

5 Turn Down Landing Valve



Product Code No.	Description	Inlet Sizes	Outlets	Material Of Construction
LV-RT-63	2 1/2" (63mm) Size	Flanged inlet as per ANSI Flanged inlet as per PN16 BSP Male threaded inlet NPT Male threaded inlet	2 1/2" Female Instantaneous 2 1/2" NH(M) 2 1/2" NST(M) 2 1/2" BSP(M)	Gunmetal

6 Double Outlet Type Landing Valve



Product Code No.	Description	Material Of Construction
LV-DOT-01	Made in gunmetal 4"NB flanged inlet as per ANSI/IS 1548	Gunmetal
LV-DOT-02	Made in gunmetal 4"NB flanged inlet as per PN16	S.S

7 Hose Valve



Product Code No.	Description	Material Of Construction
LV-AV-38A	1 1/2" (F) NPT X 1 1/2" (F) NPT	Flange with MS
LV-AV-38B	1 1/2" (F) NPT X 1 1/2" (M) NST (NH)	
LA-AV-63A	2 1/2" (F) NPT X 2 1/2" (F) NPT	
LV-AV-63B	2 1/2" (F) NPT X 2 1/2" (M) NST (NH)	

8 Pressure Restricting Valve



Product Code No.	Description	Material Of Construction
LV- PRV-01	1 1/2" (F) NPT x 1 1/2" (M) NST (NH)	Brass
LV- PRV-02	2 1/2" (F) NPT x 2 1/2" (M) NST (NH)	

9 Controlled Pressure Hydrant Valve



Product Code No.	Description	Material Of Construction
LV- CPH-01	Made in gunmetal 1 1/2" NB flanged inlet as per ANSI	Gunmetal S.S
LV- CPH-02	Made in gunmetal 1 1/2" NB flanged inlet as per PN16	
LV- CPH-03	Made in gunmetal 2 1/2" NB flanged inlet as per ANSI	
LV- CPH-04	Made in gunmetal 2 1/2" NB flanged inlet as per PN16	

1 2 Way Fire Hydrant



- Body : Carbon steel fabricated
- Inlet : 4" NB flanged
- Outlet : 2 x 2 1/2" / 3" flanged with landing valves
- Working pressure : 150 PSI / 10.5 Kg/cm²
- Test pressure : 325 PSI / 22.5 Kg/cm²

Product Code No.	Description
SPH-TW-01	Made in CS having 4" flanged Inlets

2 4 Way Fire Hydrant



- Body : Carbon steel
- Inlet : 6" NB flanged
- Outlet : 4 x 2 1/2" / 3" flanged with landing valves
- Working pressure : 150 PSI / 10.5 Kg/cm²
- Test pressure : 325 PSI / 22.5 Kg/cm²

Product Code No.	Description
SPH-FW-CI-01	Made in CS having 6" flanged Inlets and 4 nos flanged outlets
SPH-FW-CS-02	Made in CS having 6" flanged Inlets and 4 nos flanged outlets with 5 1/2" pumper connection & valve

3 Hydrant with Monitor



- Body : Carbon steel
- Inlet : 6" NB Flanged
- Outlet : Two instantaneous and one 4" flanged outlet for monitor
- Working pressure : 150 PSI / 10.5 Kg/cm²
- Test pressure : 325 PSI / 22.5 Kg/cm²

Product Code No.	Description
SPH-HM-01	Stand post and water monitor having 460 GPM / 1750 LPM flow capacity at 100 PSI / 7 Kg/cm ²
SPH-HM-02	Stand post and water monitor having 680 GPM / 2580 LPM flow capacity at 100 PSI / 7 Kg/cm ²
SPH-HM-03	Stand post and water-foam monitor having 460 GPM / 1750 LPM flow capacity at 100 PSI / 7 Kg/cm ²
SPH-HM-04	Stand post and water-foam monitor having 680 GPM / 2580 LPM flow capacity at 100 PSI / 7 Kg/cm ²

1 2 Way Inlet Breeching



- Body : Gunmetal or SG Iron
- Inlet : Two male instantaneous with NRV
- Outlet : 4" NB flanged
- Working Pressure : 150 PSI / 10.5 Kg/cm²
- Test Pressure : 325 PSI / 22.5 Kg/cm²

Product Code No.	Description
DRE-2W-01	Two way inlet breeching made in Gunmetal / SG Iron

2 3 Way Inlet Breeching



- Body : Gunmetal or Cast Iron
- Inlet : Three male instantaneous with NRV
- Outlet : 6" NB flanged
- Working Pressure : 150 PSI / 10.5 Kg/cm²
- Test Pressure : 325 PSI / 22.5 Kg/cm²

Product Code No.	Description
DRE-3W-01	Three way inlet breeching made in Gunmetal / SG Iron

3 4 Way Inlet Breeching



- Body : Gunmetal or Cast Iron / SG Iron
- Inlet : Four male instantaneous with NRV
- Outlet : 6" NB flanged
- Working Pressure : 150 PSI / 10.5 Kg/cm²
- Test Pressure : 325 PSI / 22.5 Kg/cm²

Product Code No.	Description
DRE-4W-01	Four way inlet breeching made in Gunmetal / SG Iron
DRE-4W-02	Four way inlet breeching made in Cast iron / SG Iron

4 Air Release Valve



- Body : Copper alloy
- Inlet Connection : Threaded male

Product Code No.	Description
DRE-ARV-01	Inlet connection with 3/4" BSP
DRE-ARV-02	Inlet connection with 1" BSP

5 Dividing and Collecting Breeching



- Conforming to IS 905
- Inlet and outlet connection : Instantaneous
- Max. working pressure : 150 PSI / 10.5 Kg/cm²
- Hydro testing pressure : 350 PSI / 22.5 Kg/cm²
- Size : 1 1/2" & 2 1/2"

Product Code No.	Description	Material Of Construction
DRE-YDB-01	Dividing breeching	Aluminium alloy
DRE-YCB-01	Collecting breeching	Gunmetal

1 Hose Reel Nozzles

I PVC / ABS Nozzles



- Jet Spray Type
- Serrated end for hose fitting
- 6 GPM @100 PSI / 24 LPM @ 7 Kg/cm²

Product Code No.	Description
HR-N-01	With ¾" serrated end
HR-N-02	With 1" serrated end

II Bronze Nozzles



- Construction in Gunmetal
- Jet spray & shut off type
- Chrome plated finish

Product Code No.	Description
HR-N-03	6 GPM / 22 LPM @100 PSI With ¾" serrated end
HR-N-04	25 GPM / 95 LPM @100 PSI With ¾" serrated end
HR-N-05	16 GPM / 60 LPM @100 PSI With 1" serrated end
HR-N-06	25 GPM / 95 LPM @100 PSI With 1" serrated end

2 Wall Mounting Type



- Fixed / Swinging type
- Side plate powder coated finish red
- Threaded Inlet connection
- Outlet connection for hose can be rotated left and right direction
- Waterways made of seamless tube
- Operating pressure: 150 PSI Max / 10.5 Kg/cm²
- Flow rate: 6 GPM at 100 PSI / 24 LPM @ 7 Kg/cm²

Product Code No.	Description	Hose Size	Hose Length	Hose reel Nozzle
HR-WM-01	Fixed type	¾" 1"	30 Meter 36 Meter	Refer codes from above
HR-WM-02	Swinging type			
HR-WM-03	Automatic type			



1 Hose Box

I Model A



- Suitable for storing one nos 7.5 mtr or 15 mtr hose and one nozzle
- H x W x D: 24" X 24" X 10"
- Lightweight & weatherproof
- Wall mounted / self standing
- Finished with post office red color

Product Code No.	Description
CA-HB-A-01	Made in FRP with wall mounted type / Self stand type
CA-HB-A-02	Made 16/18 SWG CRCA sheet with wall mounted type / Self stand

II Model B



- Suitable for storing two nos 7.5 mtr or 15 mtr hoses and one nozzle
- H x W x D: 24" x 32" x 10"
- Lightweight & weatherproof
- Wall mounted / self standing
- Finished with post office red color

Product Code No.	Description
CA-HB-B-01	Made in FRP with wall mounted type / Self stand type
CA-HB-B-02	Made in 16/18 SWG CRCA Sheet with Self standing mounted type

III Model C



- Suitable for storing two nos 7.5 mtr or 15 mtr hoses and one nozzle
- H x W x D: 24" x 30" x 10" (Greek Statics)
- Lightweight & weatherproof
- UV resistant
- Wall mounted / self standing
- Resistant to most chemicals
- Ideal for salty atmosphere

Product Code No.	Description
CA-HB-C-01	LLDPE Wall mounted / Self Stand

2 Extinguisher Box



- Lightweight & weatherproof
- Wall mounted / Self standing
- Finished with post office red colour or natural

Product Code No.	Description	Storage	Material Of Construction
CA-EB-01	300mm X 800mm X 300 mm	Single extinguisher	Mild steel
CA-EB-02	600mm X 800mm X 300 mm	Two extinguishers	S.S
CA-EB-03	300mm X 800mm X 300 mm	Single extinguisher	FRP
CA-EB-04	600mm X 800mm X 300 mm	Two extinguishers	Polyethylene
CA-EB-05	350mm X 350mm X 800 mm	Single extinguisher	
CA-EB-06	280mm X 280mm X 645 mm	Two extinguishers	



1 Short Branchpipe



- Bearing IS 903 mark
- Inlet Connection : 2 1/2" Male instantaneous
- Outlet : Solid jet nozzle
- Operating Pressure : 150 PSI Max. / 10.5 Kg/cm²
- Finish : Natural polished

Product Code No.	Description	Material Of Construction
N-SB-01	With 1/2" outlet	Gunmetal Aluminium alloy S.S 304 S.S 316
N-SB-02	With 5/8" outlet	
N-SB-03	With 3/4" outlet	
N-SB-04	With 7/8" outlet	
N-SB-05	With 1" outlet	

2 Triple Purpose / Universal Branchpipe



- IS 2871
- Type : Jet - Spray- Shut Off
- Inlet Connection : 2 1/2" male instantaneous
- Material : Gunmetal / Aluminium alloy / Stainless steel
- Operating Pressure : 150 PSI Max. / 10.5 Kg/cm²
- Finish : Natural polished / Chrome plated


Product Code No.	Description	Material Of Construction
N-TPN-01	As above	Gunmetal Aluminium alloy S.S

3 Jet - Spray and Shut Off Nozzle



- Type : Jet-spray-shut off
- Inlet connection : 1 3/4" BSP (F) threaded
- Designed to fit on standard short branch pipe
- Operating pressure : 150 PSI Max. / 10.5 Kg/cm²
- Finish : Anodized / Natural

Product Code No.	Description	Flow 100PSI/7kg/m ² GPM LPM	Material Of Construction
N-TPN-02	as above	20 300	Gunmetal Aluminium alloy

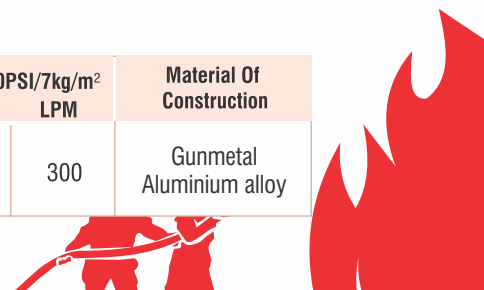

4 Three Position Branchpipe



- Ideal for marine application
- Designed for heavy professional use
- Thick water curtain due to middle teeth
- Maintenance free
- Inlet connection : 2" BSP (M) thread
- Anti-slip rubber grip

Product Code No.	Description	Flow 100PSI/7kg/m ²		Material Of Construction
		LPM	GPM	
N-TPN-02	as above	20	300	Aluminium alloy

5 Fog Nozzle



- IS 952
- Type : Jet-fog nozzle
- Inlet connection : 2½" Male instantaneous
- Material : Gunmetal
- Operating pressure : 150 PSI Max. / 10.5 Kg/cm²
- Finish : Natural polished

Product Code No.	Description
N-FN-01	as above

6 Hand Controlled Branch Pipe



- Type : Jet - spray- shut off nozzle
- Inlet connection : 2 ½" Male instantaneous as per BS 336
- Material : Aluminium alloy or PVC
- Operating pressure : 150 PSI Max. / 10.5 Kg/cm²
- Finish : Natural

Product Code No.	Description
N-HCB-01	40 GPM / 150 LPM @ 100 PSI / 7 kg/cm ² Aluminum and nozzle tip and body In PVC
N-HCB-02	40 GPM / 150 LPM @ 100 PSI / 7 kg/cm ² fully in Aluminum
N-HCB-03	120 GPM / 450 LPM @ 100 PSI / 7 kg/cm ² with additional feature of water curtain



7 Revolving Type Branch Pipe



- IS 906
- Inlet connection : 2 ½" Male instantaneous
- Material : Gunmetal
- Operating pressure : 150 PSI Max. / 10.5 Kg/cm²
- Flow : 65 GPM @ 100 PSI / 245 LPM @ 7 kg/cm²
- Finish : Natural polished

Product Code No.	Description
N-RT-01	With 2 ½" Male instantaneous inlet
N-RT-02	With flanged inlet 2 ½"NB as per ANSI
N-RT-03	With flanged inlet 3"NB as per ANSI

8 Curtain Nozzle



- Type : Curtain nozzle
- Inlet Connection : 2 ½" Male instantaneous / Threaded inlet / Flanged
- Operating Pressure : 145 PSI Max.
- Finish : Post office red color

Product Code No.	Description	Material of Construction
N-CN-01	200 GPM/750 LPM@100 PSI with 2 ½" Male instantaneous inlet	Aluminium alloy & S.S
N-CN-02	200 GPM/750 LPM@100 PSI with 2 ½" BSP female swivel inlet	
N-CN-03	200 GPM/750 LPM@100 PSI with 2 ½" NH female swivel inlet	
N-CN-04	320 GPM/750 LPM@100 PSI with 2 ½" Male instantaneous inlet	
N-CN-05	320 GPM/750 LPM@100 PSI with 2 ½" BSP female swivel inlet	
N-CN-06	320 GPM/750 LPM@ 100 PSI with 2 ½" NH female swivel inlet	

9 Constant Gallonage Nozzle

I Nuelite



- Special design gives low back pressure
- Light alloy hard anodized construction
- Straight stream to wide fog
- Pressure assisted flush without shut-off
- Acetal ball shut-off handle works smoothly at extreme ranges
- Wide fog for operator protection
- Anti-slip pistol grip finger lock
- NFPA 1964 compliant

Product Code No.	Bore (Dia)	Weight (lbs)	Flow@100PSI (7kg/cm ²)		Inlets Available
			GPM	LPM	
N-CG-NU-01	1½"	2.3 Kg	100	400	2 ½" Male Instantaneous NH (F) Threads 1 ½" & 2 ½" NST(F) Threads 1 ½" & 2 ½"
N-CG-NU-02	1½"	2.3 Kg	150	600	BSP (F) Threads 1 ½" & 2 ½"

II Fast Action Nozzle - Junior



- Special design gives low back pressure
- Constant gallonage nozzle
- Durable light hard anodized construction
- Straight stream to wide fog and flush without shut-off
- Sliding valves allow turbulence free flow
- Moulded rubber bumper with flexible fog teeth creates thick fog pattern
- Metallic pistol grip handle designed for greater comfort and control of fire
- Inlet instantaneous male coupling, NH threads
- NFPA 1964 compliant

Product Code No.	Bore (Dia)	Length(With threaded Inlet)	Weight (lbs)	Flow@100PSI (7kg/cm ²)		Inlet Available
				GPM	LPM	
N-CG-FAS-01	1"	8 ½"	3.6	95	360	2 ½" Male instantaneous NH (F) Threads NST(F) Threads BSP (F) Threads
N-CG-FAS-02	1"	8 ½"	3.6	125	473	
N-CG-FAS-03	1 1/2"	11"	5.8	150	568	
N-CG-FAS-04	1 1/2"	11"	5.8	200	757	
N-CG-FAS-05	1 1/2"	11"	5.8	250	946	

10 Dual Pressure Nozzle : Fast Action Nozzle



- Special design gives low back pressure
- Specially designed dual pressure nozzle
- At emergency mode (at low pressure), nozzle maintains same performance
- Durable light hard anodized construction
- Straight stream to wide fog and flush without shut off
- Sliding valves allows turbulence free flow
- Moulded rubber bumper with flexible fog teeth creates thick fog pattern
- Metallic pistol grip handle designed for greater comfort and control of fire
- NFPA 1964 compliant

Product Code No.	Bore (Dia)	Length(With threaded Inlet)	Weight (lbs)/ Kg	Flow@100PSI (7kg/cm²)				Inlet Available
				Standard Mode		Emergency Mode		
				GPM	LPM	GPM	LPM	
N-DP-01	1 ½"	8 ½"	5.9 / 2.7	185	700	224	850	2 ½" Male Instantaneous NH (F) Threads NST(F) Threads BSP (F) Threads



11 Selectable Gallonage Nozzle


I Superfire



- Special design gives low back pressure
- Constant selectable gallonage nozzle with multiple flow setting
- Abrasion and corrosion resistant
- Durable light hard anodized construction
- Straight stream to dense fog & flush without shut off
- Ball valve for flow control
- Anti-slip rubber moulded pistol grip
- Female inlet with instantaneous male coupling, NH threads
- NFPA 1964 compliant

Product Code No.	Bore (Dia)	Length(With threaded Inlet)	Weight (lbs) / Kg	Flow@100PSI (7kg/cm ²) GPM (LPM)	Inlet Available
N-SG-01	1 ½"	10"	5.7 / 2.06	30(115)-60(225)-95(360)-125 (473)	2 ½" Male Instantaneous NH (F) Threads
N-SG-02	1 ½"	10"	6.2/ 2.8	95(360)-125(475)-150(565)-200(750)-250(950)	NST(F) Threads BSP (F) Threads

II Superfire Junior



- Special design gives low back pressure
- Constant selectable gallonage nozzle with multiple flow setting
- Abrasion and corrosion resistant
- Durable light hard anodized construction
- Straight stream to dense fog & flush without shut off
- Ball valve for flow control
- Anti-slip rubber moulded pistol grip
- Female inlet with instantaneous male coupling, NH threads
- NFPA 1964 compliant

Product Code No.	Bore (Dia)	Length(With threaded Inlet)	Weight (lbs) / Kg	Flow@100PSI (7kg/cm ²) GPM (LPM)	Inlet Available
N-SGJ-01	1 ½"	10"	5.7 / 2.06	30 (175) 59 (225) 93 (360) 125 (470)	2 ½" Male Instantaneous NH (F) Threads NST(F) Threads BSP (F) Threads



12 Multipurpose Combination Flow Nozzle : Aqua Jet



- Solid jet and fog facilities simultaneously or independently
- Special design gives low back pressure
- Durable light hard anodized construction
- Straight stream to dense fog & flush without shut off
- Ball valve for flow control
- Anti-slip rubber moulded pistol grip
- NFPA 1964 compliant
- Compressed air foam (CAFS) capability

Product Code No.	Bore (Dia)	Length	Weight (lbs)/kg	Flow Rate Solid-Jet		Flow Rate Fog		Flow Jet + Fog		Inlet Available
				GPM	LPM	GPM	LPM	GPM	LPM	
N-MP-16	1 1/2"	9"	5.1/2.3	91	350	79	300	170	650	2 1/2" Male instantaneous NH (F) Threads NST(F) Threads BSP (F) Threads
N-MP-19	1 1/2"	9"	5.1/2.3	131	500	79	300	210	800	
N-MP-25	1 1/2"	9"	5.1/2.3	226	860	79	300	305	1160	

13 Foam Tubes



- Designed to quickly attach to bumper of nozzles
- Can be used with all types of foams
- Enhances the expansion of foam solution and delivers longer reach and heavier foam blanket


Product Code No.	Length	Fits Nozzle
FE-FT-01	14"	N-CG-FAS-01, N-CG-FAS-02
FE-FT-02	16"	N-MP-AQ-16, N-MP-AQ-19, N-MP-AQ-25, N-SG-SP-01, N-SG-SP-02.

14 High Pressure Nozzle : Challenger



- Designed for high pressure application up to 580 PSI / 40 kg/cm²
- Constant selectable gallonage nozzle with multiple flow setting
- Flow remains the same in all pattern
- Durable light hard anodized construction
- Straight stream to dense fog & flush without shut off
- Ball valve for flow control
- Unbreakable Stainless steel spinning teeth
- Anti-slip rubber moulded pistol grip
- Meets the need of forestry and municipal application where water conservation is desired
- NFPA 1964 compliant

Product Code No.	Bore (Dia)	Length(With threaded Inlet)	Weight (lbs)	Flow@100PSI (7kg/cm ²) GPM/LPM	Inlet
N-HP-01	1"	7"	2.5 / 1.16	13-25-40-60 / 49-95-151-227	1" NH (F) Thread

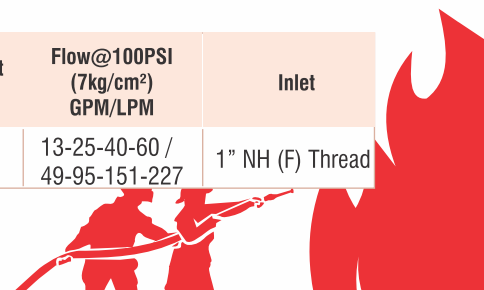

15 Nozzles for Marine Application



Pistol Grip



Standard

- Special design for Navy and Coast Guard
- Corrosion resistant
- Straight stream to wide fog
- Ball valve for flow control
- Anti-slip pistol grip finger lock
- NFPA 1964 compliant

Product Code No.	Weight (lbs) /Kg	Flow@100PSI (7kg/cm ²)		Inlet Available	Material of Constructions Nozzle
		GPM	LPM		
N-CG-MA-01	3.5 / 1.6	95	360	2 1/2" Male Instantaneous NH (F) Threads NST(F) Threads BSP (F) Threads	Gunmetal
N-CG-MA-02	3.5 / 1.6	135	511		
N-CG-MA-03	6.0 / 2.7	250	946		

16 Portable Spray Hose Nozzle



Model No. Newage SNZL - 2 1/2
Model No. Newage SNZL - 1 1/2

- 1.5" - 11.5 NPSH female thread inlet with Φ 24mm outlet port.
- 1.5" - 9 NH (NST) female thread inlet with Φ 24mm outlet port.
- 2.5" - 8 NPSH female thread inlet with Φ 34mm outlet port.
- 2.5" - 7.5 NH (NST) female thread inlet with Φ 34mm outlet port.
- 2.5" - 2.5 Morris (BS336) male coupling inlet Φ 34mm outlet port.

Normal Working pressure: 100 psig,
Approval : UL listed



1

Water Jet Monitor



- IS 8442
- Standpost mounted
- Carbon steel water ways
- Hot dip galvanised
- Bronze swivel joint with S.S ball bearings
- Flanged inlet
- Horizontal 360° & vertical +80 & -45 rotation
- Max. working pressure 150 PSI Max. / 10.5 Kg/cm²
- Locking device for horizontal and vertical position
- Solid jet nozzle

Product Code No.	Description	Flow@100PSI (7kg/cm ²)		Material of Construction Monitor	Material of Construction Nozzle
		GPM	LPM		
M-WJM-01	2 ½" Waterways	500	1900	Carbon steel S.S. Gunmetal	Gunmetal S.S. Aluminium alloy
M-WJM-02	3" Waterways	625	2370		
M-WJM-03	3" Waterways	750	3840		
M-WJM-04	4" Waterways	1000	3790		

Note: above monitors are also available with jet spray, Aqua foam nozzles & foam barrel. Please refer monitor nozzle section for nozzle details

2

Long Range Water Monitor



- Standpost mounted type
- Horizontal 360° & vertical +90 & -45 rotation
- Hand-wheel for rotation of swivel joint
- Bronze geared swivel joint with self locking
- Can be used with jet nozzle or jet spray nozzle

Product Code No.	Description	Flow@100PSI (7kg/cm ²)		Material of Construction Monitor	Material of Construction Nozzle
		GPM	LPM		
M-LRWM-01	4" Waterways with Jet Nozzle	1000	3750	Carbon steel S.S.	Gunmetal S.S.
M-LRWM-02	4" Waterways with Jet- Spray Nozzle	1000	3750		
M-LRWM-03	4" Waterways with Jet Nozzle	1250	4700		
M-LRWM-04	4" Waterways with Jet- Spray Nozzle	1250	4700		
M-LRWM-05	4" Waterways with Jet Nozzle	1500	5600	Gunmetal	Aluminium alloy
M-LRWM-06	4" Waterways with Jet- Spray Nozzle	1500	5600		
M-LRWM-07	6" Waterways with Jet Nozzle	2000	7570		
M-LRWM-08	6" Waterways with Jet- Spray Nozzle	2000	7570		
M-LRWM-09	8" Waterways with Jet Nozzle	4000	15140		



3

Long Range Water Foam Monitor



- Standpost mounted type
- Horizontal 360° & vertical +90 & -45 rotation
- Hand-wheel for rotation of swivel joint
- Available In S.S or Carbon steel
- Geared swivel joint with self locking
- 3% Or 6% Foam Induction
- Can be used with AFFF, ARFFF & Fluoro-protein foam compound
- Aqua-foam nozzle with S.S/ PVC pick up tube
- Flanged inlet 4", 6" or 8"

Product Code No.	Description	Flow@100PSI (7kg/cm ²)		Material of Construction Monitor	Material of Construction Nozzle
		GPM	LPM		
M-LRWM-01	3" Waterways with Jet- spray nozzle	500	1875	Carbon steel	Gunmetal
M-LRWM-02	3" Waterways with Jet- spray nozzle	625	2370		
M-LRWM-03	3" Waterways with Jet- spray nozzle	650	2460		
M-LRWM-04	4" Waterways with Jet- spray nozzle	1000	3750	S.S.	S.S.
M-LRWM-05	4" Waterways with Jet- spray nozzle	1250	4700		
M-LRWM-06	6" Waterways with Jet- spray nozzle	2000	7570	Gunmetal	Aluminium alloy
M-LRWM-07	8" Waterways with Jet- spray nozzle	4000	15140		

4

Water Foam Monitor : Torpedo




I Monitor with Nozzle



- Wide range 500GPM, 750GPM, 1000GPM, 2000GPM, 4000 GPM
- Anti corrosive Stainless steel construction
- Excellent compatibility with AFFF foam
- Fog angle up to 120°
- 3% foam-proportioning nozzle
- Designed for working pressure up to 10 kg/cm²

Product Code No.	Nozzle	Flow@100PSI (7kg/cm ²)		Foam Induction
		GPM	LPM	
A-FM-500	AFN-500	500	1890	3%
A-FM-750	AFN-750	750	2840	3%
A-FM-1000	AFN-1000	1000	3785	3%
A-FM-2000	AFN-2000	2000	7570	3%
A-FM-4000	AFN-4000	4000	15100	3%
A-FM-8000	AFN-8000	5000	30200	3%

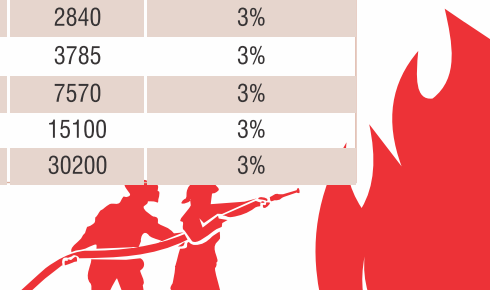

II Jet Ratio Controller Pump (JRCP)



- Compatible to use with UL listed water & foam monitor (TORPEDO)
- Corrosion resistant, excellent compatibility with AFFF foam
- With pressure gauges
- Covered in S.S casing for easy handling and storage
- With pick up tube and strainer

Product Code No.	Nozzle Flow at 100 PSI		JRCP Flow at 100 PSI		Foam Solutions Induction
	GPM	LPM	LPM	GPM	
JRCP-1000	1000	3785	125	33	3%
JRCP-2000	2000	7570	190	50	3%
JRCP-4000	4000	15100	450	120	3%
JRCP-8000	8000	30200	900	240	3%

5

Portable Ground Monitor

I Commando



- Light weight hard anodized construction
- Dual application for use as a portable monitor or deck mounting
- Safety butterfly valve
- Auto drain facility
- Safety lock at 30° above horizontal
- Available with or without foam induction or with stackable tip jet nozzles
- Stainless steel foldable legs with spikes for sturdy grip

Product Code No.	Weight Without Nozzle Kgs(lbs)	Dimension (Inch)	Nozzle Flow upto 100 PSI (7kg/cm ²)	
			GPM	LPM
WM-PGM-Commando	19(41.8)	20 X 8.5 X 8.5	1250	4700



II Nano



- Quick deployment due to lesser weight
- Operated by single fire fighter
- Hydraulic stability neutralizes the reaction force to stabilize the monitor
- Four folding Aluminium alloy legs with Carbide tipped spikes
- Can be easily shifted while attached to charged line
- Easily stored in the vehicle
- Consistent superior quality stream
- Safety strap and pouch provided

Product Code No.	Weight Without Nozzle Kgs(lbs)	Dimension (Inch)	Nozzle Flow upto 100 PSI (7kg/cm ²)	
			GPM	LPM
WM-PGM-Nano	12 (26.5)		450	1700
			500	1900

6 Remote Control Monitor : Terminator



- Available in SS, Carbon steel and Gunmetal
- Available in electric or hydroelectric remote operation
- Low maintenance cost
- Dense fog angle up to 160° for cooling
- Electric version available in AC / DC power supply
- Available in different flow range

Product Code No.	Description	Operating Voltage	Nozzle Type	Nozzle Flow at 100 PSI (7kg/cm ²)		Material of construction
WM-RCM-E01	Electric operated model	12VDC	Jet type	475	1800	Gunmetal
WM-RCM-WL-01	Available with wireless controller	24VDC	Jet spray type	500	1900	Carbon steel
WM-RCM-HE01	Hydroelectric operated	1ph, 230VAC		750	2850	
		3ph, 415VAC		1000	3750	S.S
				1250	4700	
				2000	7570	

7 Oscillating Monitor

Stand-post Mounted



- Stand-post mounted type
- Carbon steel waterways
- Oscillating range 0 to 270° adjustable
- Un-manned operation
- Smooth sweeping action produces wave like effect
- Coated with anti corrosive coating
- Jet-spray nozzle produces thick fog
- Oscillating mechanism in Gunmetal / S.S

Product Code No.	Description	Nozzle Flow at 100 PSI (7kg/cm ²)	
M-OM-SP-01	With 3 " waterways with jet- spray nozzle	750	2800
M-OM-SP-02	With 4 " waterways with jet- spray nozzle	1000	3750



8 Trolley Mounted Monitor



- 2 ½" male instantaneous inlets with NRV
- Carbon steel waterways
- Support legs for better stability during operation
- Solid rubber two / four wheels
- Gunmetal jet nozzles or jet-spray nozzle

Product Code No.	Description	Nozzle Flow at 100 PSI (7kg/cm ²)		Nozzle Option
		GPM	LPM	
M-TMM-01	With 2 ½ " waterways	500	1900	Jet nozzle
M-TMM-02	With 3" waterways	625	2365	
M-TMM-03	With 3" waterways	750	2800	Jet-spray nozzle
M-TMM-04	With 4" waterways	1000	3750	

- Customisation Available

9 Trailer Mounted Monitor with Foam Tank



- Available in different tank capacity
- Inlet size 2 ½" male instantaneous with NRV
- Available in different capacities of monitors 500, 625, 750,1000 GPM
- Trailer with robust construction suitable to tow with jeep
- Hand brake & overrun brakes
- S.S tank or carbon steel FRP / Thermoplastic poxy lined tank

Product Code No.	Description	Monitor Flow at 100 PSI (7kg/cm ²)	
		GPM	LPM
M-TMFT-01	Trailer with 500 litre foam tank	500	1900
M-TMFT-02	Trailer with 750 litre foam tank	625	2365
M-TMFT-03	Trailer with 1000 litre foam tank	750	2800
		1000	3750



1 Low Expansion Foam Branch Pipe

I Model A



- IS 2097
- Inlet Connection : 2 ½" instantaneous as per BS 336 / IS 903
- Material : Aluminum alloy or Stainless steel
- Working Pressure : 145 PSI max / 10 kg/cm²
- Foam Expansion : 8 to 10 times
- Foam Induction : Available with foam inductor or without foam Inductor

Product Code No.	Inlet Connection	Flow at 100 PSI (7kg/cm ²) GPM LPM		Throw Range in Meters	Material of construction
FE-FB-2	Without in-built foam inductor	60	225	15	Aluminium alloy
FE-FB-2X	With in-built foam inductor	60	225	15	
FE-FB-10	Without in-built foam inductor	120	450	18	
FE-FB-10X	With in-built foam inductor	120	450	18	
FE-FB-20	Without in-built foam inductor	240	900	20	S.S
FE-FB-20X	With in-built foam inductor	240	900	20	

II Model B



- IS 2097
- Inlet Connection : 2 ½" instantaneous as per BS 336 / IS 903
- Material : Aluminum alloy
- Working Pressure : 145 PSI max / 10 kg/cm²
- Foam Expansion : 8 to 10 times
- Foam Induction : Available with in-built foam inductor


Product Code No.	Description	Flow at 100 PSI (7kg/cm ²) GPM LPM		Throw Range in Meters
FE-FB-5X 01	Aluminium alloy construction	60	225	15
FE-FB-5X 02	Brass construction	60	225	15

2 Medium Expansion Foam Branch Pipe



- Inlet Connection : 2 ½" instantaneous as per BS 336 / IS 903
- Material : Stainless steel
- Working Pressure: 10 bar max.
- Foam Expansion : 50 times

Product Code No.	Description	Flow at 100 PSI (7kg/cm ²) GPM LPM		Throw Range in Meters
FE-MEP-MX5	Without in-built foam inductor	60	225	6 to 8
FE-MEP-MX10	Without in-built foam inductor	120	450	9 to 11

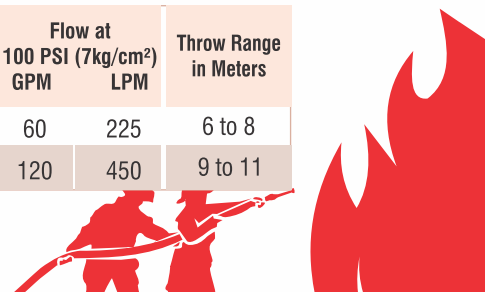

3 Foam Generator

I Mini Turbex



It is a high expansion foam generator. The unit consists of stainless steel casing; a pelton wheel turbine drives the fan and four jet nozzles discharge water foam solution in front of high velocity air. Foam making net is used for making foam. An inline inductor is used for inducing foam.

- Compact, light weight
- Portable, can be carried by single person
- Corrosion proof construction
- Can be used as a smoke extractor
- Foam Induction 3% preset
- Suitable for all types of high expansion foam concentrate
- Supplied with suitable foam inductor
- Nylon net, foam ducting and smoke ducting - standard accessories

Product Code No.	Inlet Connection (NB)	Flow at 100 PSI (7kg/cm ²)		Foam Produced	Smoke Extracted
		GPM	LPM		
FE-FG-MINI	2 ½" male Instantaneous as per BS 336	65	250	2825 Ft ³ /min	3460 Ft ³ /min

II HI-EX



It is a high expansion foam generator. It consists of a fan driven directly by the shaft of the water turbine, which blows air to the nylon net. The net is wetted by foam water solution from the spray nozzle. The foam concentrate is drawn into the water stream by means of a built-in induction system.

- By-pass valve to control foam production
- Can be used as a smoke extractor
- Lightweight
- Portable
- FRP corrosion proof body
- Low maintenance
- 2 ½" male instantaneous connection
- Suitable for all types of high expansion foam concentrate
- Inbuilt foam inductor
- Nylon net, foam ducting and smoke ducting standard accessories

Product Code No.	Operating Condition	Inlet Pressure bar/PSI	Total water Flow GPM/LPM	By-Pass Flow GPM/LPM	Expanded Foam (M ³ /min)	Expansion
FE-FG-MKII	By-pass valve closed	7/100	61 / 230	38 / 145	145	800 to 1100
	By-pass valve open	7/100	58 / 220	Nil	132	500 to 750



III Inline Foam Generator



- Inline foam generator is modified version of Inline inductor. It inducts foam as well as expands it and also transports the foam a long distance
- Inlet connection : 2 1/2" male Instantaneous as per BS 336 / IS 903
- Outlet connection : 2 1/2" female Instantaneous as per BS 336 / IS 903
- Foam induction : 3 or 6%
- Max. working pressure : 145 PSI

Product Code No.	Flow at 100 PSI (7kg/cm ²)		Material Of Construction
	GPM	LPM	
FE-FG-IFG-01	60	225	Aluminium alloy Gunmetal M.S
FE-FG-IFG-02	120	450	

4 Mobile Foam Unit

I With FRP Tank



- Made with corrosion resistant FRP tank
- Light weight, aerodynamically shaped
- Unit equipped with foam inductor, low expansion branch pipe, fire hoses
- Suitable for all type of foam concentrates
- Low maintenance

Product Code No.	Tank Capacity
FE-MFU-FRP-01	100 liters
FE-MFU-FRP-02	150 liters
FE-MFU-FRP-03	200 liters

II With Steel Tank



- Stainless steel foam tank
- Slim line, compact design
- Low center of gravity, makes steering easier
- Unit equipped with foam inductor, low expansion branch pipe, fire hoses
- Suitable for all type of foam concentrates
- Low maintenance

Product Code No.	Tank Capacity
FE-MFU-STL-01	100 liters
FE-MFU-STL-02	150 liters
FE-MFU-STL-03	200 liters



5 Foam Maker With Vapour Seal



- Applicable for fixed roof tank
- Available in wide flow range
- Treated with anti corrosive treatment
- Suitable for all types of foam concentrate
- 3 to 4 % foam expansion
- Flange connections as per ANSI

Product Code No.	Inlet Connection (NB)	Outlet Connection (NB)	Flow at 50 PSI (3.5kg/cm ²)		Material of construction
			GPM	LPM	
FE-FM-WV-01	2"	3"	20 to 60	75 to 225	Mild steel
FE-FM-WV-02	2 ½"	4"	60 to 120	225 to 450	
FE-FM-WV-03	3"	6"	120 to 240	450 to 900	
FE-FM-WV-04	4"	8"	240 to 475	900 to 1800	
FE-FM-WV-05	6"	10"	475 to 715	1800 to 2700	

6 Foam Maker Without Vapour Seal



- Applicable for floating roof tank
- Available in wide flow range
- Treated with anti corrosive treatment
- Suitable for all types of foam concentrate
- 3 to 4 % foam expansion
- Flange connections as per ANSI

Product Code No.	Inlet Connection (NB)	Outlet Connection (NB)	Flow at 50 PSI (3.5kg/cm ²)		Material of construction
			GPM	LPM	
FE-FM-WOV-01	2"	3"	20 to 60	75 to 225	Mild steel
FE-FM-WOV-02	2 ½"	4"	60 to 120	225 to 450	
FE-FM-WOV-03	3"	6"	120 to 240	450 to 900	
FE-FM-WOV-04	4"	8"	240 to 475	900 to 1800	
FE-FM-WOV-05	6"	10"	475 to 715	1800 to 2700	



7 Inline Inductor

I Variable Inline Inductor



- 2½" Instantaneous inlet and outlet connections
- Foam induction rates can be adjusted from 0% to 6%
- Body material : Aluminium
- Inbuilt non return valve to foam inlet
- Foam concentrate drawn through a pick up tube
- Light weight, portable

Product Code No.	Flow at 100 PSI (7kg/cm²)	
	GPM	LPM
FE-ID-V-01	60	225
FE-ID-V-02	120	450

II Fixed Inline Inductor



- For fixed installation systems
- With 3 or 6% foam induction
- Available in wide range of flow
- Carbon steel construction treated with anti corrosive coatings
- Flanged inlet & outlet connection as per ANSI

Product Code No.	Inlet & outlet Flanges NB	Flow at 100 PSI (7kg/cm²)		End Connection
		GPM	LPM	
FE-ID-F-01	2"	20 to 60	75 to 225	Instantaneous as per BS 336/ IS 903, flanged as per ANSI
FE-ID-F-02	2.5"	60 to 120	225 to 450	
FE-ID-F-03	3"	120 to 240	450 to 900	Flanged as per ANSI
FE-ID-F-04	4"	240 to 480	900 to 1800	
FE-ID-F-05	6"	480 to 715	1800 to 2700	



8 Foam Used in Fire Protection

I Protein Foam Compound



- DIFR Tested & TAC Approved
- Synthetic polyvalent foam forming liquid, pseudo-plastic consisting of surface active substances and polymer additives
- Having good resistance to contamination of hydrocarbons and to dehydration of polar solvents
- It is to be used in 3% concentration on hydrocarbons and at 6% concentration on polar solvents

Product Code No.	Description	Packing Available	Certificates
FE-F-AL-01	As above	20 Ltrs Steel drums 20 Ltrs Polyethylene jerry cans 30 Ltrs Polyethylene jerry cans 200 Ltrs Steel barrels	UL / IS

II Fluoro-protein Foam Compound



Product Code No.	Description	Packing Available
FE-F-FF-01	As above	20 Ltrs Polyethylene jerry cans 30 Ltrs Polyethylene jerry cans 200 Ltrs Steel barrels

III High Expansion Foam Compound



Product Code No.	Description	Packing Available
FE-F-HEF-01	As above	20 Ltrs Polyethylene jerry cans 30 Ltrs Polyethylene jerry cans 200 Ltrs Steel barrels

IV Aqueous Film Forming Foam (AFFF)



Product Code No.	Description	Packing Available
FE-F-HEF-01	Non UL Listed	20 Ltrs Polyethylene jerry cans 30 Ltrs Polyethylene jerry cans 200 Ltrs Steel barrels
FE-F-AFFF-02	UL listed	20 Ltrs Polyethylene jerry cans 30 Ltrs Polyethylene jerry cans 200 Ltrs Steel barrels



1 Water Spray Nozzles

I Medium Velocity Nozzle



Product Code No.	Description	Threaded Inlet Connection	'K' Factor	Spray Angle In Degree	Material of Construction	Finish
SSE-SN-M-01	1/2" Size	BSP BSPT NPT	24, 28, 31, 36, 41, 45, 51, 57, 61, 66, 71, 76, 81, 86, 91	60, 75, 80, 90, 100, 110, 120, 140, 180	Forged Brass	Natural Chrome plated
SSE-SN-M-02	3/4" Size					

II High Velocity Nozzle



Product Code No.	Description	Threaded Inlet Connection	'K' Factor	Spray Angle In Degree	Material of Construction	Finish
SSE-SN-M-01	1/2" Size	BSP BSPT NPT	18 25 32 47	75 80 85 90	Brass S.S 304	Natural Chrome plated
SSE-SN-M-02	3/4" Size					

2 Automatic Sprinklers



- UL listed
- Made out of bronze
- Maximum working pressure 175 PSI / 12.25 kg/cm²

I Pendent Type



Response Type	Orientation	SIN No.	K Factor	Make	End Connection	Temperature Rating	Approval	Finish
Standard	Pendant	NISRP02/NI052	5.6(80)	NEWAGE	1/2" NPT or 1/2" PT	68°C/79°C	UL Listed	Chrome Finish
Quick	Pendant	NIQRP02/NI062	5.6(80)	NEWAGE	1/2" NPT or 1/2" PT	68°C/79°C	UL Listed	Chrome Finish



II Upright Type



- UL Listed
- Made out of Bronze
- Maximum working pressure 175 PSI / 12.25 kg/cm²

Response Type	Orientation	SIN No.	K Factor	Make	End Connection	Temperature Rating	Approval	Finish
Standard	Upright	NISRU02/NI032	5.6(80)	NEWAGE	1/2" NPT or 1/2" PT	68°C/79°C	UL listed	Chrome finish
Quick	Upright	NIQRU02/NI042	5.6(80)	NEWAGE	1/2" NPT or 1/2" PT	68°C/79°C	UL listed	Chrome finish

III Side Wall Mounted Type



- UL Listed
- Made out of Bronze
- Maximum working pressure 175 PSI / 12.25 kg/cm²

Response Type	Orientation	SIN No.	K Factor	Make	End Connection	Temperature Rating	Approval	Finish
Standard	Horizontal Sidewall	NI012	5.6(80)	NEWAGE	1/2" NPT or 1/2" PT	68°C/79°C	UL listed	Chrome finish
Quick	Horizontal Sidewall	NI022	5.6(80)	NEWAGE	1/2" NPT or 1/2" PT	68°C/79°C	UL listed	Chrome finish

IV Concealed Sprinklers



- Discharge rate : 22 GPM
- Max. working pressure : 175 PSI / 12.25 kg/cm²
- Nominal temp. : 68° and cover plate 57°
- Hole dia required in ceiling : 60 to 70 mm
- Fusible metal : Tin alloy about 60%

Response Type	Orientation	SIN No.	K Factor	Make	End Connection	Temperature Rating	Approval	Finish
Standard	Concealed	NI072	5.6(80)	NEWAGE	1/2" NPT or 1/2" PT	68°C/79°C	UL listed	Chrome finish
Quick	Concealed	NI082	5.6(80)	NEWAGE	1/2" NPT or 1/2" PT	68°C/79°C	UL listed	Chrome finish

Note : a) 57°C/93°C - Standard response Pendant / Upright SIN No.- NI 032 / NI052 respectively
 b) 57°C/93°C - Quick response Pendant / Upright SIN No.- NI042 / NI062 respectively
 c) Maximum working pressure for above sprinkler - 175 PSI & Hydrotest pressure is 1.5 times of max. working pressure
 d) Min. coverage area for above sprinkler is 9 Sq.mtr and max. coverage area upto 12 Sq.mtr



3

Sprinkler Flexible Hoses

I Unbraided Flexible Sprinkler Hose



Model	Rated Working Pressure, PSI	Outlet, inch	K-factor	Assembly Length, ft (mm)	Max. no. of 90° bends	Min. Bend Radius, inch	Eq. Length of 1" Sc. 40 Steel Pipe (C=120), ft
NFAP25-07	200	1/2"	5.6(80)	2.3 (700)	1	5	26
NFAP25-10	200	1/2"	5.6(80)	3.3 (1000)	1	5	36
NFAP25-12	200	1/2"	5.6(80)	3.9 (1200)	3	5	67
NFAP25-15	200	1/2"	5.6(80)	4.9 (1500)	3	5	84
NFAP25-18	200	1/2"	5.6(80)	5.9 (1800)	3	5	101

NFAP25-07	200	3/4"	8.0(115)	2.3 (700)	1	5	32
NFAP25-10	200	3/4"	8.0(115)	3.3 (1000)	1	5	42
NFAP25-12	200	3/4"	8.0(115)	3.9 (1200)	3	5	73
NFAP25-15	200	3/4"	8.0(115)	4.9 (1500)	3	5	77
NFAP25-18	200	3/4"	8.0(115)	5.9 (1800)	3	5	105

Model	Rated Working Pressure, PSI	Outlet, inch	K-factor	Assembly Length, ft (mm)	Max. no. of 90° bends	Min. Bend Radius, inch	Eq. Length of 1" Sc. 40 Steel Pipe (C=120), ft
NI25UB-700	175	1/2"	5.6(80)	2.3 (700)	1	4	24
NI25UB-1000	175	1/2"	5.6(80)	3.3 (1000)	2	4	44
NI25UB-1200	175	1/2"	5.6(80)	3.9 (1200)	2	4	49
NI25UB-1500	175	1/2"	5.6(80)	4.9 (1500)	2	4	59
NI25UB-1800	175	1/2"	5.6(80)	5.9 (1800)	3	4	84

NI25UB-700	175	3/4"	8.0(115)	2.3 (700)	1	4	30
NI25UB-1000	175	3/4"	8.0(115)	3.3 (1000)	2	4	48
NI25UB-1200	175	3/4"	8.0(115)	3.9 (1200)	2	4	55
NI25UB-1500	175	3/4"	8.0(115)	4.9 (1500)	2	4	64
NI25UB-1800	175	3/4"	8.0(115)	5.9 (1800)	3	4	86



Water Based Sprinkler System Equipment

II Braided Flexible Sprinkler Hose




Model	Rated Working Pressure, PSI	Outlet, inch	K-factor	Assembly Length, ft (mm)	Max. no. of 90° bends		Min. Bend Radius, inch		Eq. Length of 1" Sc. 40 Steel Pipe (C=120), ft	
					UL	FM	UL	FM	UL	FM
NI27-SB-700	200	1/2"	5.6(80)	2.3 (700)	1	1	5	11.8	26	33.0
NI27-SB-1000	200	1/2"	5.6(80)	3.3 (1000)	1	2	5	11.8	36	43.6
NI27-SB-1200	200	1/2"	5.6(80)	3.9 (1200)	3	3	5	11.8	67	55.9
NI27-SB-1500	200	1/2"	5.6(80)	4.9 (1500)	3	4	5	11.8	84	67.5
NI27-SB-1800	200	1/2"	5.6(80)	5.9 (1800)	3	4	5	11.8	101	78.8

NI27-SB-700	200	3/4"	8.0(115)	2.3 (700)	1	1	5	11.8	32	28.3
NI27-SB-1000	200	3/4"	8.0(115)	3.3 (1000)	1	2	5	11.8	42	48.1
NI27-SB-1200	200	3/4"	8.0(115)	3.9 (1200)	3	3	5	11.8	73	86.8
NI27-SB-1500	200	3/4"	8.0(115)	4.9 (1500)	3	4	5	11.8	77	111.0
NI27-SB-1800	200	3/4"	8.0(115)	5.9 (1800)	3	4	5	11.8	105	120.8

Model	Rated Working Pressure, PSI	Outlet, inch	K-factor	Assembly Length, ft (mm)	Max. no. of 90° bends		Min. Bend Radius, inch		Eq. Length of 1" Sc. 40 Steel Pipe (C=120), ft	
					UL	FM	UL	FM	UL	FM
NI25B-07	175	1/2"	5.6(80)	2.3 (700)	1	1	7.5	10	12	26.4
NI25B-10	175	1/2"	5.6(80)	3.3 (1000)	1	1	7.5	10	42	34.1
NI25B-12	175	1/2"	5.6(80)	3.9 (1200)	3	2	7.5	10	53	46.8
NI25B-15	175	1/2"	5.6(80)	4.9 (1500)	3	3	7.5	10	68	61.4
NI25B-18	175	1/2"	5.6(80)	5.9 (1800)	3	4	7.5	10	94	76.1

NI25B-07	175	3/4"	8.0(115)	2.3 (700)	1	1	7.5	10	21	19.4
NI25B-10	175	3/4"	8.0(115)	3.3 (1000)	1	1	7.5	10	47	28.4
NI25B-12	175	3/4"	8.0(115)	3.9 (1200)	3	2	7.5	10	49	39.5
NI25B-15	175	3/4"	8.0(115)	4.9 (1500)	3	3	7.5	10	73	54.8
NI25B-18	175	3/4"	8.0(115)	5.9 (1800)	3	4	7.5	10	99	70.1

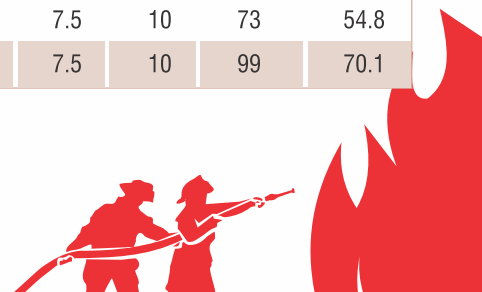

3

Alarm Valve



- UL listed
- Made from Cast Iron
- Rated pressure 175 PSI / 12.25 kg/cm²
- Test pressure 350 PSI / 23.2 kg/cm²

Product Code No.	Description
SSE-AV-01	4" Flanged connection vertical installed
SSE-AV-02	6" Flanged connection vertical installed

4

Butterfly Valve



Specifications

- Type : Wafer / Grooved end
- Size : 2 1/2", 3", 4", 6" & 8"
- Working Pressure : 175 PSI / 12.25 kg/m² & 300 PSI / 21kg/m²
- Hydro test Pressure: 350 PSI / 24.5 kg/m² & 600 PSI / 42 kg/m²

Factory installed UL approved tampered switch for indoor and outdoor use.

Materials

- Body : Ductile Iron
- Disc : Ductile Iron, EPDM encapsulated
- Stem : Stainless steel, hardened and tempered
- Housing : Ductile Iron (ASTM A-536)
- Hand wheel : Ductile Iron (ASTM A-536)



1 Portable Fire fighting Pump

I Low Discharge Pump



- IS 942
- Diesel engine operated pump
- Diesel engine : 1080CC single cylinder, air cool, 7.2 HP
- Pump : Single stage centrifugal, high tensile aluminium alloy
- Inlet : 3" Male round threads
- Outlets : 2 1/2" female instantaneous
- Priming : Exhaust priming system
- Starting : Battery started
- Output : 545 LPM @ 2.5 Kg/cm²
305 LPM @ 3.5 Kg/cm²
275 LPM @ 4.0 Kg/cm²

II High Discharge Pump - Mfd. By M/s. Tohatsu Corp., Japan

Model : VE1500



Model : VF 53AS



Model : V20FS



Specifications	VE1500	VF53AS	V20FS
Product code	FP-HP-HD-01	FP-HP-HD-02	FP-HP-HD-03
Engine	2 Stroke water cooled gasoline engine	4 Stroke water cooled gasoline engine	2 Stroke air cooled gasoline engine
Pump	Single suction Single stage	Single suction Single stage	Single suction Single stage
Inlet	4" Male round thread	3" Male round thread	3" Male round thread
Outlet	2Nos. 2 1/2" female instantaneous as per IS 903 / BS 336	2Nos. 2 1/2" female instantaneous as per IS 903 / BS 336	1No. 2 1/2" female instantaneous as per IS 903 / BS 336
Starting	Electric & recoil start	Electric & recoil start	Electric & recoil start
Priming	Rotary-vane vacuum pump-oilless type	Rotary-vane vacuum pump-oilless type	Rotary-vane vacuum pump-oilless type
Max outlet pressure	145 PSI/10 kg/cm ²	145 PSI/10 kg/cm ²	115 PSI/8 kg/cm ²
Control panel	Centralised control panel for controlling pump	Centralised control panel for controlling pump	control panel for controlling pump
Performance at 3m suction height	2050 LPM @ 6 kg/cm ² 1800 LPM @ 8 kg/cm ² 1500 LPM @ 10 kg/cm ²	1200 LPM @ 6 kg/cm ² 950 LPM @ 8 kg/cm ² 700 LPM @ 10 kg/cm ²	525 LPM @ 6kg/cm ² 250 LPM @ 8kg/cm ²



2 Aqua Float - The Floating Pump

Model A



Model B



Model C



- Light weight and portable
- Can be operated by a single person
- Uses : 1. Fire fighting 2. Dewatering 3. Rescue Operation 4. Marine applications 5. Pool maintenance 6. Irrigation

Specifications	Model A	Model B	Model C
Engine	2 Stroke air cooled gasoline engine	4 Stroke air cooled gasoline engine	4 Stroke air cooled gasoline engine
Pump	Single stage self priming	Single stage self priming	Single stage self priming
Outlet	2½" Female instantaneous as per IS 903 / BS 336	2½" Female instantaneous as per IS 903 / BS 336	2½" Female instantaneous as per IS 903 / BS 336
Max. outlet pressure	100 PSI / 7 kg/cm ²	45 PSI / 3 kg/cm ²	38 PSI / 2.5 kg/cm ²
Max. flow	140 GPM / 530 LPM	95 LPM / 360 LPM	310 GPM / 1180 LPM
Weight	20 kgs	29.5 kgs	26 kgs
Float	Polyethylene filled with PU foam	Polyethylene filled with PU foam	Polyethylene filled with PU foam

3 Turbo Pump



- It is a water turbine driven centrifugal pump
- Mixing of clean drive water with pump medium does not take place
- Turbine inlet and outlet : 2 ½" male and female Instantaneous as per BS 336 / IS 903
- Pump outlet : 2 1/2" female instantaneous as per BS 336 / IS 903
- Feed water flow : 225 GPM / 900 LPM @ 100 PSI / 7 kg/cm²
- Flood water flow : 350 GPM / 1325 LPM at 6 meter head
185 GPM / 700 LPM at 15 meter head
- Strainer made of Brass / S.S

Product Code No.	Material of Construction
FP-TP-01	Gunmetal
FP-TP-02	Aluminum alloy



4 Dewatering Pump

I Ejector Pump



- Material of construction : Aluminium alloy
- Working pressure : Max- 145 PSI / 10 kg/cm²
Min-72 PSI / 5 kg/cm²
- Feed water inlet : 2 1/2" Instantaneous as per BS 336 / IS 903
- Suction inlet : 4" Round male thread
- Suction outlet : 4" Round male thread
- Max. suction depth : 10 meters

Product Code No.	Performance
FP-EP-01	170 GPM / 645 LPM @100 PSI / 7 kg/cm ²
FP-EP-02	150 GPM / 570 LPM @100 PSI / 7 kg/cm ²

II Adjustable Ejector Pump




- The adjustability features, make it possible to vary the angle of throw of water for effective operation
- Material of construction : Aluminium alloy
- Working Pressure : Max- 10 bar , Min-5 bar
- Suction Inlet : 2 1/2 " male instantaneous as per BS 336 / IS 903
- Suction Outlet : 2 1/2" female instantaneous as per BS 336 / IS 903

Product Code No.	Feed Water Flow	Floodwater Flow
FP-AEP-01	66 GPM / 250 LPM @100 PSI / 6 kg/cm ²	140 GPM @ 6 Meter head

5 Portable Water Mist System



- It uses atomised water in dense mist form for fire extinguishing
- Suitable for both class A and class B fires
- Rapid attack pistol with triplex attachment for jet, spray and foam
- Non conductive, safe on electrical equipment and computers
- Non-corrosive, Non-irritant, Non-toxic and Bio-degradable
- Minimal maintenance
- Pressure upto 250 bar
- Flow upto 50 LPM
- Model : FP 100
- Engine : 13 HP, 4 stroke, petrol engine
- Pump : Triplex plunger pump,
26 LPM @ 120 bar, 1450 rpm
- Tank capacity : water : 100 liters, foam : 30 liters
- Hose reel : 30 meters of high pressure hose
- Range in still air condition : Solid stream 12-15 mts, foam 12-15 mts,
water mist- 6-8 mts
- Optional : 55 watt floodlight

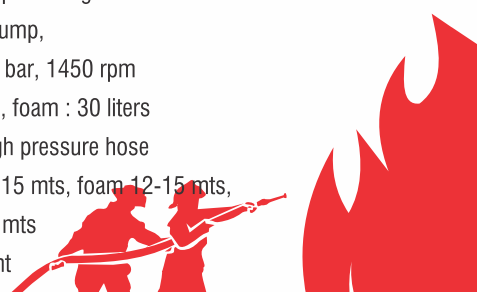

1 Warning Appliances

I Hand Operated Siren



- IS 6026
- Cradle mounted
- Made from Aluminium alloy
- Range : 1.6 Km

Product Code No.

MIS-WA-02

II Electric Operated Siren



- Available in horizontal and vertical mounted
- Made from Aluminium alloy
- 12VDC or 24VDC or 200 V or 440VAC operated
- Audiable range in KM is 0.10 to 16

Product Code No.

MIS-WA-03

2 Smoke Extractor Fan

A) Water Turbine Driven



- Water turbine driven smoke extractor fan
- Corrosion resistant stainless steel construction
- Light weight, portable
- Inlet and outlet are 2 1/2" instantaneous
- 3 meter long P.V.C. collapsible ducting for carrying smoke

Product Code No.

MIS-SEF-01

Performance

Smoke Extraction 55 m³ / min at
100 PSI / 7 kg/cm² Water inlet pressure



B) Petrol Engine Driven



- Petrol engine driven smoke extractor fan
- Mild steel construction
- Light weight, portable
- Accessories
 - Φ 300 mm x 7.5 m PVC flame retardant collapsible suction hose
 - Φ 300 mm x 20 m PVC flame retardant flat delivery hose

Product Code No.	Performance
MIS-SEF-02	Smoke extraction 60 m ³ /min

C) Electric Motor Driven



- Flameproof motor driven smoke extractor fan
- Corrosion resistant Aluminium alloy construction
- Light weight, portable
- Accessories
 - Φ 300 mm x 5 m PVC flame retardant collapsible suction hose
 - Φ 300 mm x 5 m PVC flame retardant flat delivery hose

Product Code No.	Performance
MIS-SEF-03	Smoke extraction 15 m ³ /min

3 Smoke Generator For Training Purpose



- Compact, portable, high performance and reliable smoke machine
- Capable of producing a large volume of dense smoke
- Smoke produced is white, non toxic, non flammable
- Running time 30 minutes
- Warm up time 15 minutes

Product Code No.	Performance
MIS-SG-01	Smoke output 20 M ³ /min



4 Hose Washing Machine



- Aluminium alloy construction
- Inlet - 2½ inst.
- Washes hoses with coupling
- Operating pressure - 100PSI / 7 kg/cm²

5 Hose Binding Machine



- Compatible for binding fire hoses with delivery hose couplings and suction hose couplings
- Drive: 440V, 3 phase electric generator motor
- Rugged construction
- Easy to maintain
- Accessories: Complete set of 1½" & 2½" instantaneous adaptors and 3" & 4" suction adaptors





CERTIFICATE



**Management system as per
EN ISO 9001:2015**

In accordance with TÜV AUSTRIA CERT procedures, it is hereby certified that

NEWAGE FIRE PROTECTION INDUSTRIES PVT. LTD.

**Office: 04, Champaklal Udyog Bhawan, Sion (East),
Mumbai - 400022, Maharashtra, India**

**Factory: No. 5 & 6, Takai Adoshi Road, Khopoli - 410203,
Dist - Raigad, Maharashtra, India**

applies a management system in line with the above standard for the
following scope

**Design, Manufacturing, Marketing, Installation & After Sales
Services of Fire Protection and Rescue Product or Equipments**

Certificate Registration No. 20100183004589

Valid until 2021-10-30
Initial certification: 2018-10-31

Certification Body
at TÜV AUSTRIA CERT GMBH

Vienna, 2018-10-31


This certification was conducted in accordance with TÜV AUSTRIA CERT auditing and certification
procedures and is subject to regular surveillance audits.
TÜV AUSTRIA CERT GMBH Deutschstraße 10 A-1230 Wien www.tuv.at



www.tuv.at/onlinecheck

and Evaluation from TÜV AUSTRIA | The reproduction of this document is subject to the approval by TÜV AUSTRIA

ZERTIFIKAT | CERTIFICATE | CERTIFICAT | CERTIFICADO | СЕРТИФИКАТ | شهادة | 证书 | 인증서

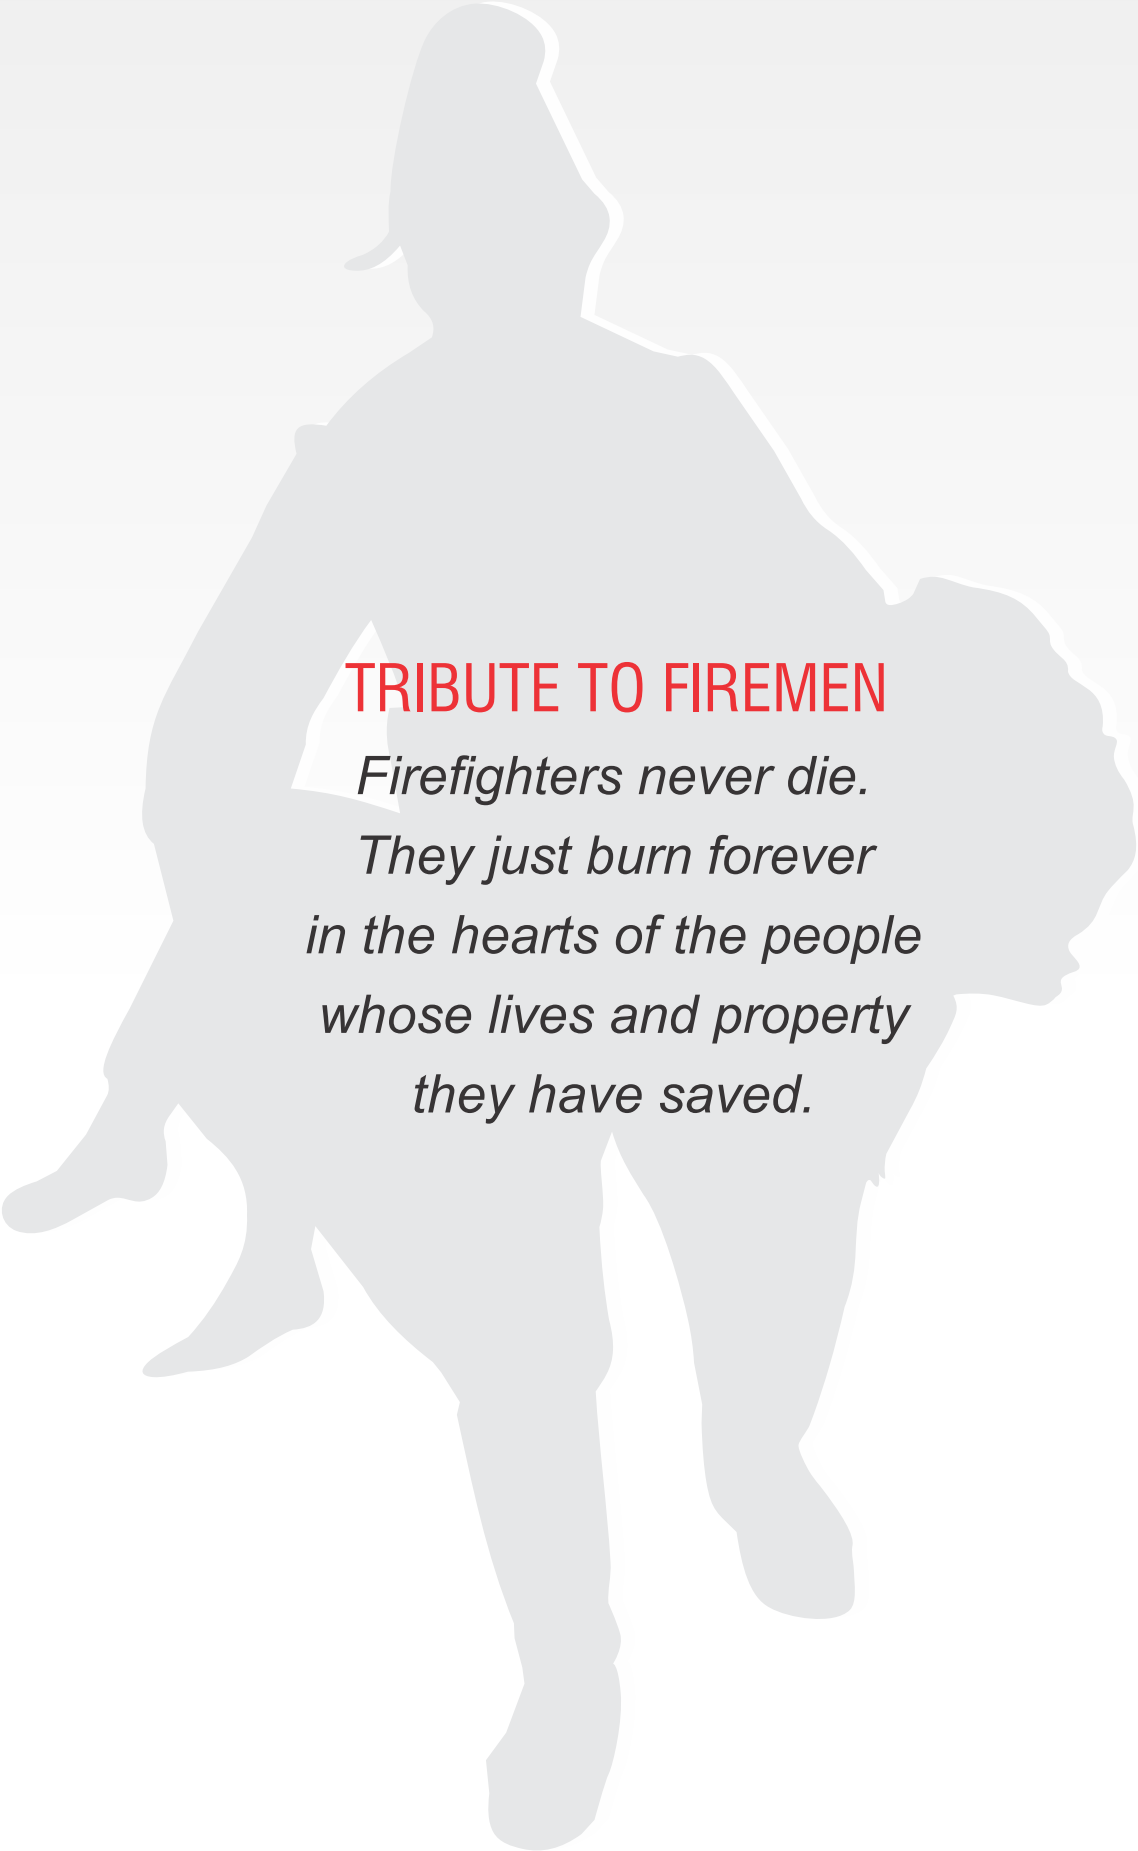

TRIBUTE TO FIREMEN

*Firefighters never die.
They just burn forever
in the hearts of the people
whose lives and property
they have saved.*





Head Office:

4, Champaklal Udyog Bhavan, Sion (E), Mumbai - 400 022. India.

Tel.: +91-22-4351 1500 / 24077421 • Fax : +91-22-2407 1320

E-mail : info@newagefireprotection.com • Website : www.newagefire.co

Works:

Khopoli • Maharashtra • India.